



Product Range Guide



Some products are Class A devices according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

Index—Product Range Guide

Overview	
The Lexmark DNA is where it all begins	3
Reliability	3
Security	3
Data privacy	4
Productivity and performance	4
Flexibility	4
Ease of use	5
Quality	5
Colour capabilities and management	5
Manageability	6
Sustainability	6
Accessibility	7
Firmware updates	7
Industry knowledge	7
Product information	
Colour Multifunction Products	Mono Multifunction Products
XC2326 8	XM1342 35
XC4240 10	XM1246 37
XC4140 12	XM3250 39
XC4150 14	XM5365 41
XC6152 Series 16	XM5370 43
XC8160 Series 19	XM7300 Series 45
XC9200 Series 21	XM9100 Series 48
Colour Printers	Mono Printers
C2326 27	M1342 50
C4150 29	M1246 52
C6160 31	M3250 54
C9235 33	M5255 56
	M5270 58

No longer a printer but an intelligent device

Today's business environments are ever-evolving. The workplace has gone beyond the ability of any single device to reach the efficiency and productivity requirements of today's 24/7, technology-savvy, always-connected workforce. The era of treating printers as purely standalone devices and task-specific machines is over. New breed of printers are intelligent devices equipped with the latest business solutions to address the most demanding needs of consumers.



The Lexmark DNA is where it all begins

The product design goals and shared attributes that characterise every device in the spectrum of Lexmark products constitute a sort of unique "DNA" that makes them truly intelligent devices.

Reliability

Lexmark is serious about reliability. It's a key design component of all our devices. Whether it's support for millions of pages, sturdy steel frames, or long-life components, each device has been designed with a particular kind of user in mind.

Our philosophy is to build devices that meet the ever-demanding needs of varied buyers, making sure we understand the different use-case scenarios and environments. This deep approach to customer understanding has led to design changes across many product dimensions. For example, we've implemented more robust and user-friendly features such as paper tray detents to fully close the drawer and provide tactile user confirmation. We've developed auto-recovery and jam-assist algorithms to help keep devices online, with at-a-glance action guidelines to help customers quickly and easily clear occasional jams. Advanced monitoring tools that help you watch over the fleet and respond proactively are built into every Lexmark device.

This determined focus on reliability is part of the reason why Lexmark's award-winning devices offer excellent value that delivers high return on investment.

Security

Lexmark maintains a tenacious yet quiet focus on security. We work in the background, hardening our devices and software, earning third-party certifications and partnering with customers to enhance and augment their overall security practises. It's a proven, decades-long, no-hype approach to help keep customer output environments safe. Our comprehensive approach to product security provides a full spectrum of security capabilities. As a result, Keypoint Intelligence - Buyers Lab honoured Lexmark with a prestigious BLI PaceSetter award for Document Imaging Security*.



Secure access features restrict who can use your devices and what they can do. Network security features protect devices from unauthorised access over network interfaces. Secure remote management provides a wide range of tools and device capabilities to effectively manage a fleet of networked laser printers and multifunction products to make sure they are always up to date. Hard disc security helps to protect information stored on the device against unauthorised access and hacking.

Our document security solutions require authentication before a user can access functions on the printer or multifunction product (MFP), including copy, fax, scan, or the retrieval of printed output, eliminating unclaimed jobs sitting on the printer.

*Award based on Western Europe data



Data privacy

Like most companies, Lexmark closely monitors the development of data privacy regulations around the world, including the General Data Protection Regulation (GDPR) created in the EU. In response, Lexmark has established a robust privacy organisation tasked with ensuring our systems, process and people properly handle all types of data across the company.

Lexmark printers and MFPs provide multiple, built-in security features that help customers meet many of their data privacy requirements, including access controls, audit logs and embedded OS protections. These features are available across our entire product line.



Productivity and performance

Productivity equates to performance, which is another attribute in our products' DNA. Performance is most commonly associated with printing, copying, or scanning quickly, and Lexmark's devices were built to go above and beyond in that arena. Performance is also demonstrated in our portfolio of ready-to-use solutions for specialised industries. Performance also equates to less downtime, a Lexmark standard that has driven us to implement extra-high-yield toner delivery systems, and replaceable imaging components that last up to 720,000 pages. Our multi-core processor colour platform devices support outputs at up to 66 in mono, 65 in colour pages per minute (A4)*.

The consistent use of open technology standards and software integrations allow apps and connectors to move information seamlessly from paper, to electronic storage, to enterprise applications to fully complete many processes without traditional manual steps. The Lexmark product lineup ultimately is not only about fast, efficient and smart devices. It's more about the way the Lexmark devices maximise a team's productivity.

Flexibility

Flexibility is the differentiator that gives every Lexmark product the ability to adapt to user needs as their business evolves. Our wide product line offers a variety of features, built for workgroups small to large.

Lexmark's Embedded Solutions Framework (eSF) lets users load and run software solutions tailored to their specific need or industry—a fundamental building block of our hardware's flexibility. Properly configured, apps installed on our intelligent devices can interact with users' unique processes, applications and data repositories, with custom icons to drive each process, if desired.

Updates are flexible, too, with new functionality and features delivered via firmware upgrades and genuine Lexmark accessories—extending product life and adding value to devices without having to purchase the newest hardware model.



*Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

Ease of use

Ease of use starts with the crucial connection between users and their Lexmark devices, through our e-Task interface. Users can easily walk through each step using an intuitive icon- and text-driven user interface. This consistent interface across every Lexmark device ensures users always know what to do and guides them through the entire process from changing supplies to adding paper.

Phone and tablet users interact with today's most advanced devices, and this similar omni-touch user experience is available in our devices so you can expect to get the work done quickly and easily. Our devices work the way you expect them to—with a consistent and intuitive user experience across the portfolio—and in perfect sync with the other devices you depend on to get work done.

Quality

Our devices let you print on a wide variety of complex media, including paper, vinyl, polyester and so much more. Also, users don't need to re-print faded pages, or shake the cartridge to use all its toner. With engineering designed to maximise uptime built into every device, users can concentrate on their work, not maintenance chores.

Features like file compression and accurate scanning are critical, too. Built-in image processing can automatically straighten pages, remove spots and improve image contrast—leading to more readable pages and better conversion to text.

Colour capabilities and management



Accurate colour: Lexmark colour devices provide both PANTONE® calibration and embedded colour sample pages to help you nail stunning colour at the design stage. Lexmark Colour Replacement technology combines spot colour replacement and RGB replacement for precision matching of critical colours such as those found in corporate logos. It's colour so accurate, you can do everything in house and on demand.

Flexible colour: Our colour technology provides an exhaustive list of colour controls that can minimise risk associated with the expense of colour print. Black and white lock lets you specify restricted time windows when the printer can print colour. Colour permission restricts the access to colour printing to authorise users only. Proof then print lets you check the document before you print to reduce waste of multiple print jobs. Toner saver lets you select from three toner levels to reduce toner usage. Colour saver reduces toner on colour graphs and photos, but leaves text readable. Coverage estimator allows users to estimate the cost to print a colour page before printing. In addition, when colour toner supplies are empty, the user can choose to run in mono only mode until colour toner is replaced.

Manageability

Manageability is a trait of all Lexmark devices. Our devices are designed to interact, allowing you to discover devices, track assets, monitor and correct issues, and proactively manage even the largest fleets. Exclusive MarkVision Enterprise software scales control from a handful of devices to thousands, through a Web-based interface that grants access based on individual users' roles and responsibilities.

Personalised and custom configuration settings can easily be handled on Lexmark devices to cater to unique business needs from corporate-wide policy down to the process or application level. With Lexmark, you can distribute digitally-signed app and firmware updates to keep all your devices in sync and, while minimising the risk of viruses and worms.

Optimise print queue management, control device usage policies, simplify mobile printing options, and provide support for secure print release with Lexmark Print Management. With integrated tracking and accounting tools to analyse usage patterns, you'll have the information you need to more effectively manage your output infrastructure.



Sustainability

Lexmark continuously seeks new ways to reduce our footprint. While making great strides in waste reduction at our global manufacturing facilities, we also provide an opportunity for our customers to reduce their waste and increase the number of Lexmark products that are reused and recycled.

By incorporating Life Cycle Assessment results in our product design process, we develop sustainable products that combine high standards of performance, efficiency and environmental stewardship through each life cycle stage. At the end of product life, Lexmark recovers components and parts to reuse or recycle through: the Lexmark Cartridge Collection Programme (LCCP)* and the Lexmark Equipment Collection Programme (LECP).

Our extensive cartridge collection network has made Lexmark an industry leader in the recovery, remanufacturing and recycling of used toner cartridges. In 2016, through the efforts of Lexmark customers, more than 38 percent of the total toner cartridges shipped worldwide were returned through the LCCP. In some regions, the return rate was higher. For example, the United States continues to average approximately 50 percent return rates. We estimate the industry average collection rates to be between 20 and 30 percent.

*LCCP is not available in Asia Pacific Countries (APC) (except Australia and New Zealand) and the People's Republic of China (PRC).



Accessibility

Accessibility solutions are woven into the design of all Lexmark devices to meet the specific needs of people with varying levels of abilities. We have established external relationships with design experts and accessibility analysts, to draw on their insights to improve our future products and solutions. We also seek input from customers with disabilities to better understand their unique requirements. We visit our customers to discuss how our printing and software solutions can increase productivity in the workplace. We also meet with them to see how they currently use Lexmark solutions and to hear their ideas and suggestions for future solution applications. The result is innovative approaches that make it easier to use our systems to accommodate a wide range of unique user needs while also addressing a variety of accessibility guidelines and regulations.

The Lexmark Accessibility Council has also established relationships with accessible design experts and accessibility analysts, such as the American Foundation for the Blind (AFB), the American Printing House for the Blind (APH), and Bluegrass Council of the Blind (BCB). We draw on their insights to improve the design of future products and solutions. The result is innovative accommodations that make it easier to use our systems and address a variety of accessibility regulations and guidelines, including Section 508 and EN 301549.



Firmware updates

Lexmark continues to deliver firmware updates to add or improve functionality or enhance security. These updates are provided through our standard support channels and device deployment tools. New firmware notifications and updates are communicated as they are available and delivered. These updates are digitally signed and encrypted to ensure that only genuine firmware updates can be installed in all Lexmark devices.



Industry knowledge

Lexmark has industry knowledge and solutions built for the way you work. Today's businesses are more vast in size and scope than ever before, and are constantly faced with the daunting task of managing information from two connected, but different sources: print and digital.

At Lexmark, we know that it's when these two sources collide and intersect that information errors, security breaches and process delays often occur. That's why our solutions are designed to bring paper and digital information together and streamline processes, regardless of source. Our solutions resolve print management inefficiencies, address security breaches and threats, and enhance business process automation to tackle the most unique industry information challenges.



1 Multifunction product with 7.2 cm touch screen
344.4 x 411.2 x 394.1 mm

2 250-Sheet tray
Dimensions included as part of base model

3 250-Sheet Tray
103.9 x 411.2 x 381.0 mm

4 250-Sheet Tray
103.9 x 411.2 x 381.0 mm

Note 1: Supports up to two optional 250-sheet trays.

Note 2: All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at http://www.lexmark.com/publications/furniture_safety/

Standard

Optional



lexmark.com

Product specifications		Lexmark XC2326
Print		
Display	2.8 inch (7.2 cm) LCD touch panel	
Print Speed: Up to ⁵	Black: 24.7 ppm / Colour: 24.7 ppm	
Time to First Page: As fast as	Black: 10.8 seconds / Colour: 11 seconds	
Print Resolution	Black: 600 x 600 dpi, 4800 CQ (2400 x 600 dpi) / Colour: 600 x 600 dpi, 4800 CQ (2400 x 600 dpi)	
Memory	Standard: 1 GB / Maximum: 1 GB / Standard: 1024 MB / Maximum: 1024 MB	
Hard Disk	Not Available	
Recommended Monthly Page Volume ²	750 - 5000 pages	
Maximum Monthly Duty Cycle: Up to ³	75000 pages per month	
Copy		
Copy Speed: Up to ⁵	Black: 24.7 cpm / Colour: 24.7 cpm	
Time to First Copy: as fast as	Black: 12.1 seconds / Colour: 13.3 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 90 / 96 sides per minute / Colour: 40 / 42 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 45 / 48 sides per minute / Colour: 20 / 21 sides per minute	
ADF Paper Input Capacity: Up to	50 pages 75 gsm bond	
Fax		
Modem Speed	Max is 33,600 bps, V.34 Half-Duplex Kbps	
Supplies ⁶		
Laser Cartridge Yields (up to) ¹	5,500-page Black High Yield Cartridge, 6,000-page Color (CMY) High Yield Cartridges	
Cartridge(s) Shipping with Product ⁷	1,500-page Colour (CMY) Return Program Toner Cartridges, 1,500-page Black Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	250-Sheet Input, Integrated Duplex, Single-Sheet Manual Feed, 100-Sheet Output Bin	
Optional Paper Handling	250-Sheet Tray	
Paper Input Capacity: Up to	Standard: 250+1 pages 75 gsm bond / Maximum: 750+1 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 100 pages 75 gsm bond / Maximum: 100 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Glossy paper, Plain Paper, Hagaki Card, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Hagaki Card, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front Hi-Speed USB port Compatible with USB 2.0 Specification (Type A), 802.11ac Wireless	
Noise Level: Operating	Print: 51/52 dBA / Copy: 56 dBA / Scan: 55 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 3048 Meters (10,000 Feet), Temperature: 10 to 32°C (50 to 90°F)	
Size (mm - H x W x D) / Weight	344.4 x 411.2 x 394.1 mm / 19.4 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹Average yield based on approximately 5% print coverage. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁶Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁷Average yield based on approximately 5% print coverage.





1 XC4240 with 17.8 cm e-Task colour touch screen
462 x 442 x 608 mm

2 650-sheet duo tray
133 x 424 x 416 mm

Note 1: Supports one optional 650-sheet duo tray; or one optional 650-sheet duo tray and one optional 550-sheet tray with the 650-sheet duo tray on top.

Note 2: All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at http://www.lexmark.com/publications/furniture_safety/

3 550-sheet tray
133 x 424 x 416 mm

Adjustable printer stand (not shown)
521 x 653 x 625 mm

Swivel cabinet (not shown)
263 x 476 x 600 mm

Standard

Optional




Product specifications		Lexmark XC4240
Print		
Display	Lexmark e-Task 7-inch (17.8 cm) color touch screen	
Print Speed: Up to ⁶	Black: 38 ppm / Colour: 38 ppm	
Time to First Page: As fast as	Black: <8 seconds / Colour: <8 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi)	
Memory	Standard: 2048 MB / Maximum: 6144 MB	
Hard Disk	Included in configuration	
Recommended Monthly Page Volume ²	1500 - 10000 pages	
Maximum Monthly Duty Cycle: Up to ³	100000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 38 cpm / Colour: 38 cpm	
Time to First Copy: as fast as	Black: 8 seconds / Colour: 9 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 94 / 100 sides per minute / Colour: 60 / 64 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 47 / 50 sides per minute / Colour: 30 / 32 sides per minute	
ADF Paper Input Capacity: Up to	100 pages 75 gsm bond	
Fax		
Modem Speed	Max is 33,600 bps, V.34 Half-Duplex Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	6,000-page Color (CMY) Cartridges, 9,000-page Black Cartridge	
Photoconductor Estimated Yield: Up to ⁵	125,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ¹	2,000-page Colour (CMY) Return Program Toner Cartridges, 3,000-page Black Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	250-Sheet Input, 150-Sheet Output Bin, Integrated Duplex, Single-Sheet Manual Feed	
Optional Paper Handling	550-Sheet Tray, 650-Sheet Duo Tray	
Paper Input Capacity: Up to	Standard: 250+1 pages 75 gsm bond / Maximum: 1450+1 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond	
Media Types Supported	Card Stock, Paper Labels, Plain Paper, Vinyl Labels, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Hagaki Card, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports	Marknet N8372 WiFi Option	
Noise Level: Operating	Print: 52 dBA / Copy: 55 dBA / Scan: 51 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 3048 Meters (10,000 Feet), Temperature: 10 to 32°C (50 to 90°F)	
Size (mm - H x W x D) / Weight	462 x 442 x 608 mm / 27.5 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details.

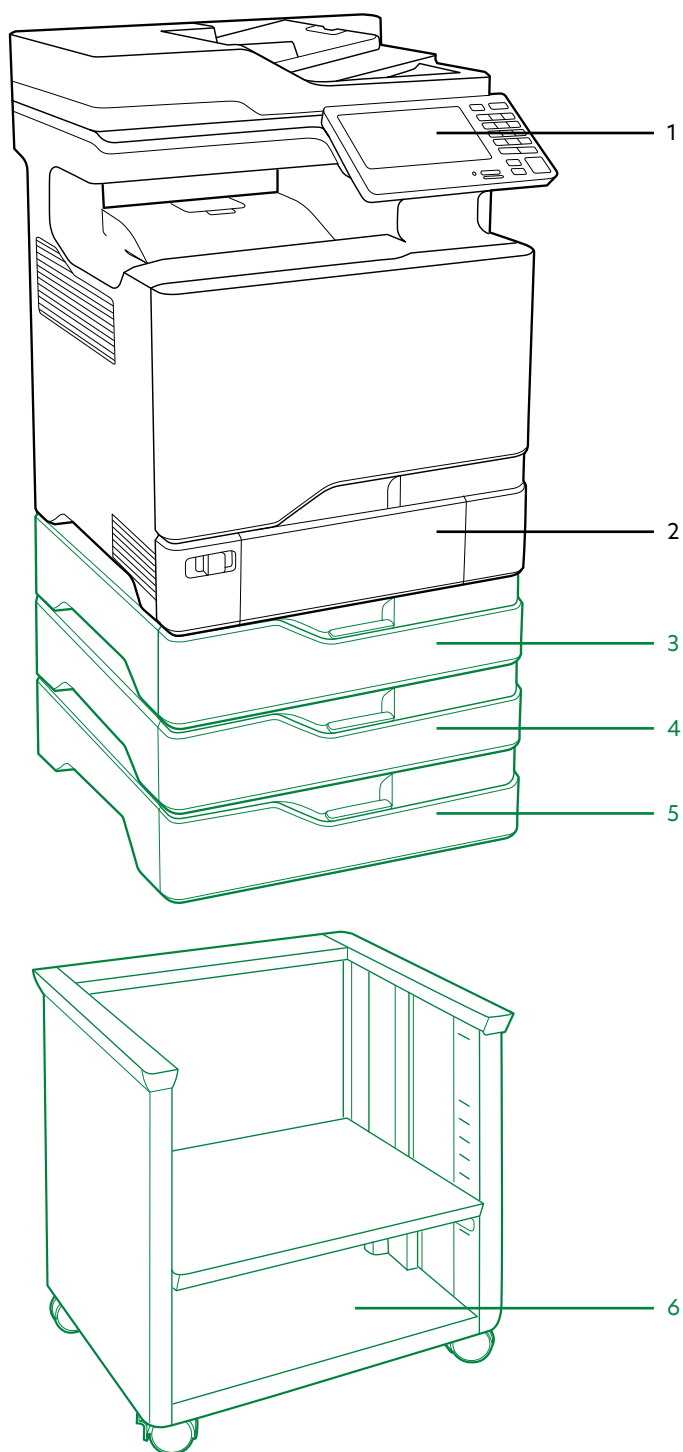

- 1 17.8 cm colour touch screen
- 2 550-sheet input with 100-sheet multi-purpose feeder
- 3 550-sheet tray

- 4 550-sheet tray
- 5 550-sheet tray
- 6 Adjustable printer stand

■ Standard

■ Optional




[lexmark.com](https://www.lexmark.com)

Product specifications		Lexmark XC4140
Print		
Display	Lexmark e-Task 17.8 cm (7-inch) colour touch screen	
Print Speed: Up to ⁶	Black: 38 ppm / Colour: 38 ppm	
Time to First Page: As fast as	Black: 6.0 seconds / Colour: 6.5 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi)	
Memory	Standard: 2048 MB / Maximum: 4096 MB	
Hard Disk	Option available	
Recommended Monthly Page Volume ²	1500 - 15000 pages	
Maximum Monthly Duty Cycle: Up to ³	120000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 38 cpm / Colour: 38 cpm	
Time to First Copy: as fast as	Black: 7.0 seconds / Colour: 8.0 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / RADF (reversing Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 26 / 28 sides per minute / Colour: 26 / 28 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 56 / 60 sides per minute / Colour: 56 / 60 sides per minute	
ADF Paper Input Capacity: Up to	50 pages 75 gsm bond	
Fax		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	20,000-page Black High Yield Cartridge, 13,000-page Color (CMY) High Yield Cartridges	
Imaging Unit Estimated Yield: Up to	150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	7,000-page Black and Colour (CMYK) Return Program Toner Cartridges	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex, 300-Sheet Output Bin	
Optional Paper Handling	550-Sheet Tray	
Paper Input Capacity: Up to	Standard: 650 pages 75 gsm bond / Maximum: 2300 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 300 pages 75 gsm bond / Maximum: 300 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Paper Labels, Plain Paper, Vinyl Labels, Banner Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear Hi-Speed USB port Compatible with USB 2.0 Specification (Type A)	
Optional Network Ports	Internal MarkNet N8360 802.11b/g/n Wireless, NFC	
Noise Level: Operating	Print: 52 dBA / Copy: 56 dBA / Scan: 54 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	648 x 505 x 533 mm / 44.9 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

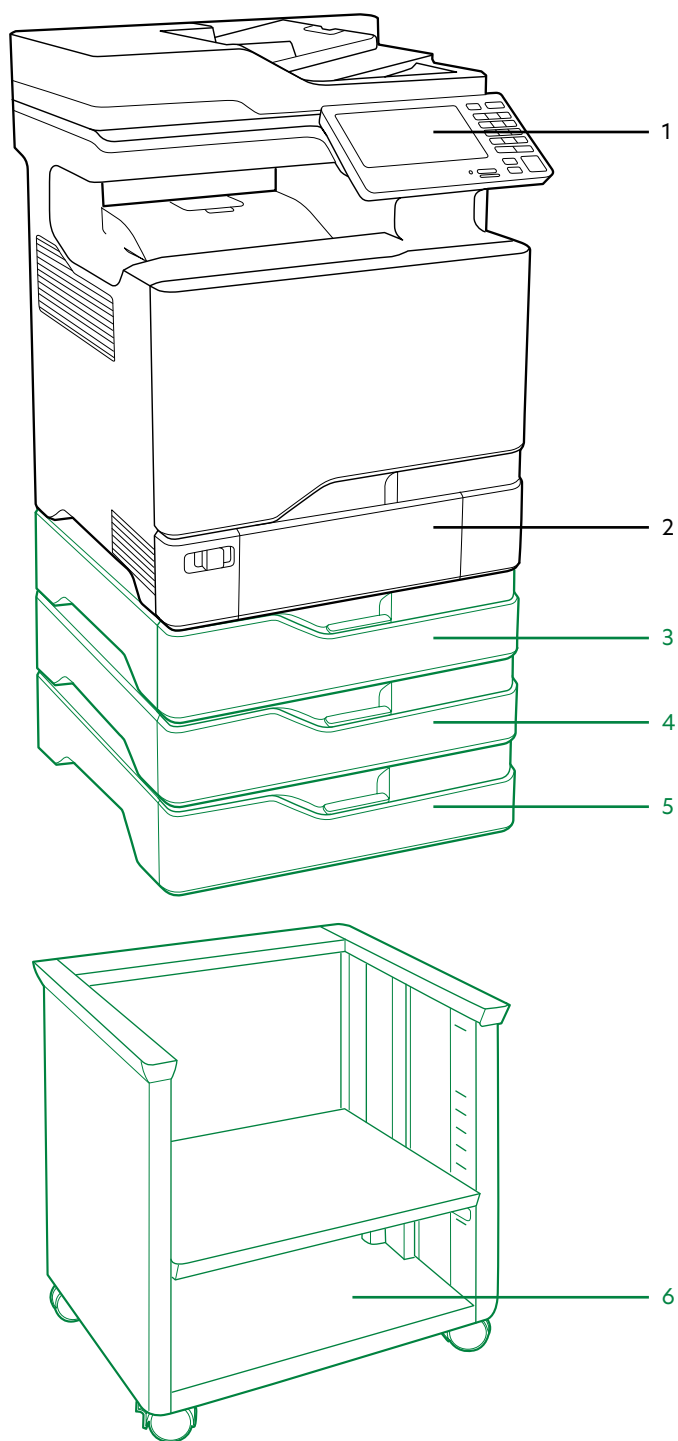

- 1 17.8 cm colour touch screen
- 2 550-sheet input with 100-sheet multi-purpose feeder
- 3 550-sheet tray

- 4 550-sheet tray
- 5 550-sheet tray
- 6 Adjustable printer stand

Standard

Optional




[lexmark.com](https://www.lexmark.com)

Product specifications		Lexmark XC4150
Print		
Display	Lexmark e-Task 17.8 cm (7-inch) colour touch screen	
Print Speed: Up to ⁶	Black: 47 ppm / Colour: 47 ppm	
Time to First Page: As fast as	Black: 5.0 seconds / Colour: 5.5 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi)	
Memory	Standard: 2048 MB / Maximum: 4096 MB	
Hard Disk	Included in configuration	
Recommended Monthly Page Volume ²	2000 - 20000 pages	
Maximum Monthly Duty Cycle: Up to ³	150000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 47 cpm / Colour: 47 cpm	
Time to First Copy: as fast as	Black: 6.5 seconds / Colour: 7.0 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / RADF (reversing Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 26 / 28 sides per minute / Colour: 26 / 28 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 56 / 60 sides per minute / Colour: 56 / 60 sides per minute	
ADF Paper Input Capacity: Up to	50 pages 75 gsm bond	
Fax		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	20,000-page Black High Yield Cartridge, 13,000-page Color (CMY) High Yield Cartridges	
Imaging Unit Estimated Yield: Up to	150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	7,000-page Black and Colour (CMYK) Return Program Toner Cartridges	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex, 300-Sheet Output Bin	
Optional Paper Handling	550-Sheet Tray	
Paper Input Capacity: Up to	Standard: 650 pages 75 gsm bond / Maximum: 2300 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 300 pages 75 gsm bond / Maximum: 300 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Paper Labels, Plain Paper, Vinyl Labels, Banner Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear Hi-Speed USB port Compatible with USB 2.0 Specification (Type A)	
Optional Network Ports	Internal MarkNet N8360 802.11b/g/n Wireless, NFC	
Noise Level: Operating	Print: 53 dBA / Copy: 56 dBA / Scan: 53 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	648 x 505 x 533 mm / 44.9 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

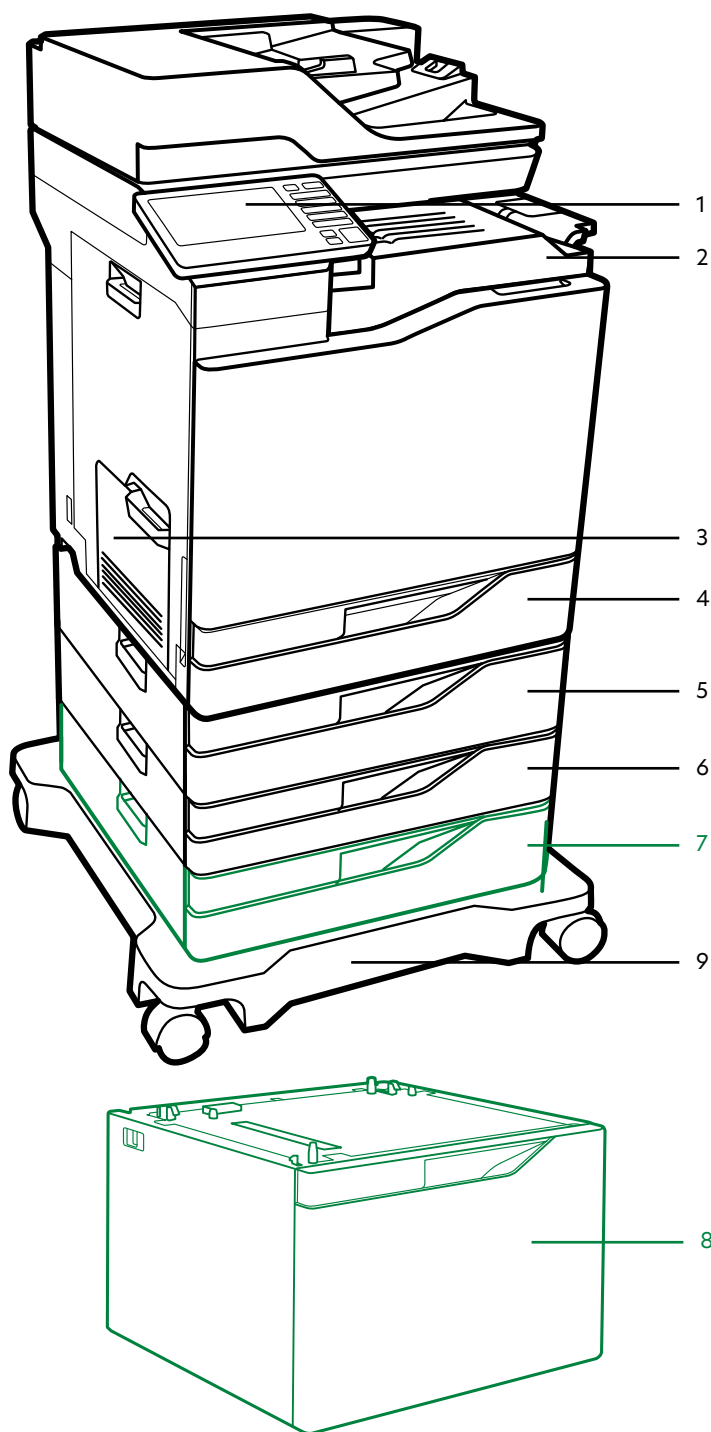

- 1 17.8 cm colour touch screen
- 2 In-line finisher
- 3 100-sheet multipurpose feeder
- 4 500-sheet input
- 5 550-sheet tray

- 6 550-sheet tray
- 7 550-sheet tray
- 8 2200-sheet high capacity tray
- 9 Castor base

 Standard

 Optional



[lexmark.com](https://www.lexmark.com)

Product specifications		Lexmark XC6152de
Print		
Display	Lexmark e-Task 17.8 cm (7-inch) colour touch screen	
Print Speed: Up to ⁶	Black: 50 ppm / Colour: 50 ppm	
Time to First Page: As fast as	Black: 7 seconds / Colour: 7 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi)	
Memory	Standard: 2048 MB / Maximum: 4096 MB	
Hard Disk	Included in configuration	
Recommended Monthly Page Volume ²	2500 - 25000 pages	
Maximum Monthly Duty Cycle: Up to ³	200000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 50 cpm / Colour: 50 cpm	
Time to First Copy: as fast as	Black: 6.5 seconds / Colour: 7.5 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 114 / 120 sides per minute / Colour: 114 / 120 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 57 / 60 sides per minute / Colour: 57 / 60 sides per minute	
ADF Paper Input Capacity: Up to	150 pages 75 gsm bond	
Fax		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	25,000-page Black Extra High Yield Cartridge, 20,000-page Color (CMY) Extra High Yield Cartridges	
Photoconductor Estimated Yield: Up to ⁵	175000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	8,000-page Black and Colour (CMYK) Return Program Toner Cartridges	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex, 300-Sheet Output Bin	
Optional Paper Handling	550-Sheet Tray, Inline Stapler, 2200-Sheet Tray	
Paper Input Capacity: Up to	Standard: 650 pages 75 gsm bond / Maximum: 4500 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 300 pages 75 gsm bond / Maximum: 300 pages 75 gsm bond	
Media Types Supported	Card Stock, Dual Web Labels, Envelopes, Labels, Plain Paper, Polyester Labels, Vinyl Labels, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C4 Envelope, C5 Envelope, DL Envelope, Index Card, Executive, Folio, JIS-B5, Legal, Letter, 4 x 6", Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A), Two Front USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports	Marknet N8370 WiFi Option	
Noise Level: Operating	Print: 55 dBA / Copy: 58 dBA / Scan: 55 dBA	
Specified Operating Environment	Humidity: 15 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	763 x 559 x 588 mm / 82.3 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.


¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

Product specifications		Lexmark XC6152dtfe
Print		
Display	Lexmark e-Task 17.8 cm (7-inch) colour touch screen	
Print Speed: Up to ⁶	Black: 50 ppm / Colour: 50 ppm	
Time to First Page: As fast as	Black: 7 seconds / Colour: 7 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi)	
Memory	Standard: 2048 MB / Maximum: 4096 MB	
Hard Disk	Included in configuration	
Recommended Monthly Page Volume ²	2500 - 25000 pages	
Maximum Monthly Duty Cycle: Up to ³	200000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 50 cpm / Colour: 50 cpm	
Time to First Copy: as fast as	Black: 6.5 seconds / Colour: 7.5 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 114 / 120 sides per minute / Colour: 114 / 120 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 57 / 60 sides per minute / Colour: 57 / 60 sides per minute	
ADF Paper Input Capacity: Up to	150 pages 75 gsm bond	
Fax		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	25,000-page Black Extra High Yield Cartridge, 20,000-page Color (CMY) Extra High Yield Cartridges	
Photoconductor Estimated Yield: Up to ⁵	175000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	8,000-page Black and Colour (CMYK) Return Program Toner Cartridges	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex, 2 x 550-Sheet Tray, Inline Stapler, 300-Sheet Output Bin	
Optional Paper Handling	550-Sheet Tray, 2200-Sheet Tray	
Paper Input Capacity: Up to	Standard: 1750 pages 75 gsm bond / Maximum: 4500 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 300 pages 75 gsm bond / Maximum: 300 pages 75 gsm bond	
Media Types Supported	Card Stock, Dual Web Labels, Envelopes, Labels, Plain Paper, Polyester Labels, Vinyl Labels, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C4 Envelope, C5 Envelope, DL Envelope, Index Card, Executive, Folio, JIS-B5, Legal, Letter, 4 x 6", Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A), Two Front USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports	Marknet N8370 WiFi Option	
Noise Level: Operating	Print: 55 dBA / Copy: 58 dBA / Scan: 55 dBA	
Specified Operating Environment	Humidity: 15 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	1137 x 649 x 588 mm / 134.7 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

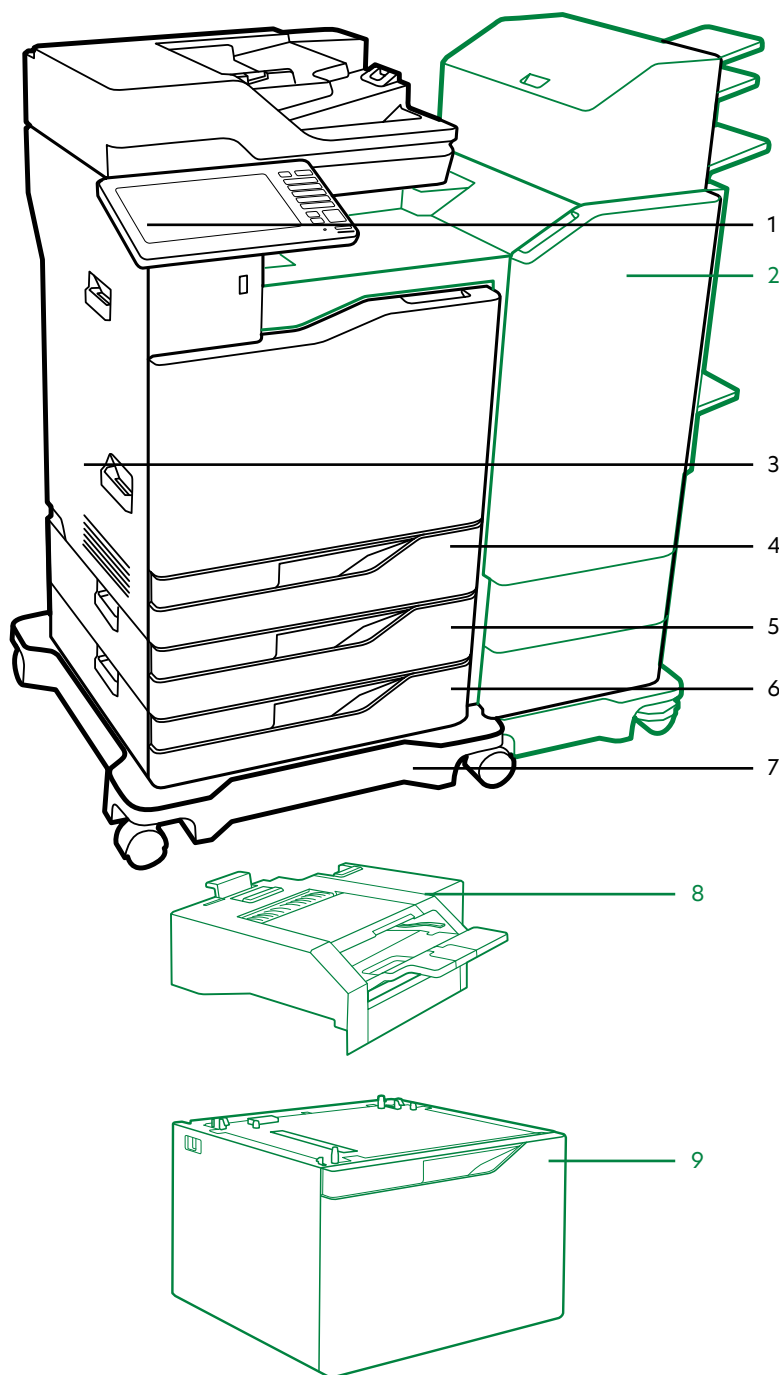

- 1 25 cm class colour touch screen
- 2 Professional finisher 1950
- 3 100-sheet multipurpose feeder
- 4 500-sheet input
- 5 550-sheet tray

- 6 550-sheet tray
- 7 Castor base
- 8 In-line finisher
- 9 2200-sheet high capacity tray

Standard

Optional




lexmark.com

Product specifications		Lexmark XC8160dte
Print		
Display	Lexmark e-Task 10-inch (25 cm) class colour touch screen	
Print Speed: Up to ⁶	Black: 57 ppm / Colour: 57 ppm	
Time to First Page: As fast as	Black: 6.5 seconds / Colour: 6.5 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi)	
Memory	Standard: 2048 MB / Maximum: 4096 MB	
Hard Disk	Included in configuration	
Recommended Monthly Page Volume ²	5000 - 50000 pages	
Maximum Monthly Duty Cycle: Up to ³	350000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 57 cpm / Colour: 57 cpm	
Time to First Copy: as fast as	Black: 6.0 seconds / Colour: 7.0 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 114 / 120 sides per minute / Colour: 114 / 120 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 57 / 60 sides per minute / Colour: 57 / 60 sides per minute	
ADF Paper Input Capacity: Up to	150 pages 75 gsm bond	
Fax		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	50,000-page Black and Color (CMYK) Ultra High Yield Cartridges	
Photoconductor Estimated Yield: Up to ⁵	175000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	17,000-page Colour (CMY) High Yield Return Program Toner Cartridges, 50,000-page Black Ultra High Yield Return Program Cartridge	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex, 2 x 550-Sheet Tray, 500-Sheet Output Bin	
Optional Paper Handling	550-Sheet Tray, Staple Punch Finisher, Inline Stapler, 2200-Sheet Tray	
Paper Input Capacity: Up to	Standard: 1750 pages 75 gsm bond / Maximum: 4500 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 500 pages 75 gsm bond / Maximum: 1950 pages 75 gsm bond	
Media Types Supported	Card Stock, Dual Web Labels, Envelopes, Labels, Plain Paper, Polyester Labels, Vinyl Labels, Refer to the Card Stock & Label Guide., Banner Paper	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C4 Envelope, C5 Envelope, DL Envelope, Index Card, Executive, Folio, JIS-B5, Legal, Letter, 4 x 6", Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A), Two Front USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports	Marknet N8370 WiFi Option	
Noise Level: Operating	Print: 56 dBA / Copy: 59 dBA / Scan: 55 dBA	
Specified Operating Environment	Humidity: 15 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	1162 x 559 x 588 mm / 131.3 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸Black - Average yield at approximately 5% print coverage. Cyan, Magenta and Yellow - Average continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

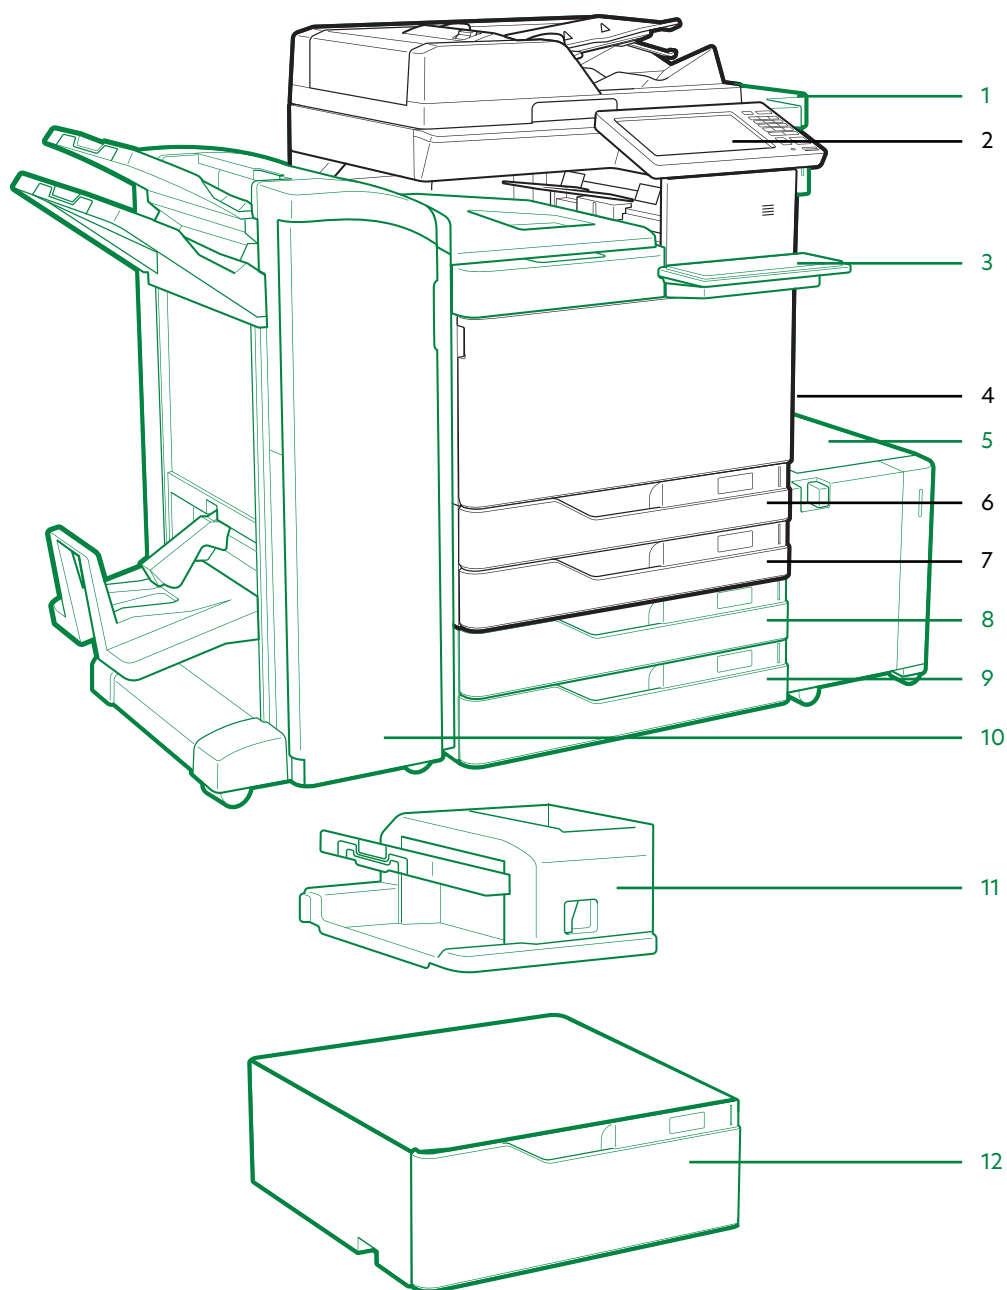

- | | |
|-----------------------------------|--|
| 1 Working table | 7 500-sheet input |
| 2 25 cm class colour touch screen | 8 500-sheet tray |
| 3 Keyboard | 9 500-sheet tray |
| 4 150-sheet multipurpose feeder | 10 Booklet finisher or staple punch finisher |
| 5 3000-sheet tray | 11 Staple finisher (except XC9265) |
| 6 500-sheet input | 12 2500-sheet tray |

■ Standard

■ Optional



Product specifications		Lexmark XC9225
Print		
Display	Lexmark e-Task 10-inch (25 cm) class colour touch screen	
Print Speed: Up to ⁶	Black: 25 ppm / Colour: 25 ppm	
Time to First Page: As fast as	Black: 7 seconds / Colour: 8.3 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi)	
Memory	Standard: 2048 MB / Maximum: 4096 MB	
Hard Disk	Included in configuration	
Recommended Monthly Page Volume ²	4000 - 20000 pages	
Maximum Monthly Duty Cycle: Up to ³	150000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 25 cpm / Colour: 25 cpm	
Time to First Copy: as fast as	Black: 7.2 seconds / Colour: 8.5 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 160 / 160 sides per minute / Colour: 160 / 160 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 80 / 80 sides per minute / Colour: 80 / 80 sides per minute	
ADF Paper Input Capacity: Up to	100 pages 75 gsm bond	
Fax		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	30,000-page Black and Color (CMYK) Cartridges	
Photoconductor Estimated Yield: Up to ⁵	90000 Black / 55000 (CMY) pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Developer Unit(s) Estimated Yield: Up to ⁵	600000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	6,000-page Colour (CMY) Toner Cartridges, 5,000-page Black Toner Cartridge	
Paper Handling		
Included Paper Handling	Integrated Duplex, 250-Sheet Output Bin, 150-Sheet Multipurpose Feeder, 2 x 500-Sheet Input	
Optional Paper Handling	Staple Finisher, Staple Punch Finisher, 2500-Sheet Tandem Tray, 3000-Sheet Tray, Booklet Finisher, 2 x 500-Sheet Tray	
Paper Input Capacity: Up to	Standard: 1150 pages 75 gsm bond / Maximum: 6650 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 250 pages 75 gsm bond / Maximum: 3500 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Labels, Plain Paper, Banner Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Super Tabloid (12 x 18”), Oficio, A6, SRA3	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A), Two Front USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports / Optional Local Ports	Marknet N8370 WiFi Option / External RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 51 dBA / Copy: 54 dBA / Scan: 53 dBA	
Specified Operating Environment	Altitude: 0 - 2500 Meters (8,200 Feet), Humidity: 15 to 85% Relative Humidity, Temperature: 10 to 30°C (50 to 86°F)	
Size (mm - H x W x D) / Weight	921 x 615 x 697 mm / 108.5 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

Product specifications		Lexmark XC9235
Print		
Display	Lexmark e-Task 10-inch (25 cm) class colour touch screen	
Print Speed: Up to ⁶	Black: 35 ppm / Colour: 35 ppm	
Time to First Page: As fast as	Black: 7 seconds / Colour: 8.3 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi)	
Memory	Standard: 2048 MB / Maximum: 4096 MB	
Hard Disk	Included in configuration	
Recommended Monthly Page Volume ²	4000 - 20000 pages	
Maximum Monthly Duty Cycle: Up to ³	200000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 35 cpm / Colour: 35 cpm	
Time to First Copy: as fast as	Black: 6.6 seconds / Colour: 7.9 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 160 / 160 sides per minute / Colour: 160 / 160 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 80 / 80 sides per minute / Colour: 80 / 80 sides per minute	
ADF Paper Input Capacity: Up to	100 pages 75 gsm bond	
Fax		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	30,000-page Black and Color (CMYK) Cartridges	
Photoconductor Estimated Yield: Up to ⁵	100000 Black / 90000 (CMY) pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Developer Unit(s) Estimated Yield: Up to ⁵	600000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	6,000-page Colour (CMY) Toner Cartridges, 5,000-page Black Toner Cartridge	
Paper Handling		
Included Paper Handling	Integrated Duplex, 250-Sheet Output Bin, 150-Sheet Multipurpose Feeder, 2 x 500-Sheet Input	
Optional Paper Handling	Staple Finisher, Staple Punch Finisher, 2500-Sheet Tandem Tray, 3000-Sheet Tray, Booklet Finisher, 2 x 500-Sheet Tray	
Paper Input Capacity: Up to	Standard: 1150 pages 75 gsm bond / Maximum: 6650 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 250 pages 75 gsm bond / Maximum: 3500 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Labels, Plain Paper, Banner Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Super Tabloid (12 x 18”), Oficio, A6, SRA3	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A), Two Front USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports / Optional Local Ports	Internal MarkNet N8360 802.11b/g/n Wireless, NFC, MarkNet N8230 Fiber Ethernet Print Server / External RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 51 dBA / Copy: 55 dBA / Scan: 53 dBA	
Specified Operating Environment	Altitude: 0 - 2500 Meters (8,200 Feet), Humidity: 15 to 85% Relative Humidity, Temperature: 10 to 30°C (50 to 86°F)	
Size (mm - H x W x D) / Weight	921 x 615 x 697 mm / 108.5 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

Product specifications		Lexmark XC9245
Print		
Display	Lexmark e-Task 10-inch (25 cm) class colour touch screen	
Print Speed: Up to ⁶	Black: 45 ppm / Colour: 45 ppm	
Time to First Page: As fast as	Black: 5.2 seconds / Colour: 6.1 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi)	
Memory	Standard: 2048 MB / Maximum: 4096 MB	
Hard Disk	Included in configuration	
Recommended Monthly Page Volume ²	6000 - 50000 pages	
Maximum Monthly Duty Cycle: Up to ³	225000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 45 cpm / Colour: 45 cpm	
Time to First Copy: as fast as	Black: 4.9 seconds / Colour: 5.8 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 160 / 160 sides per minute / Colour: 160 / 160 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 80 / 80 sides per minute / Colour: 80 / 80 sides per minute	
ADF Paper Input Capacity: Up to	100 pages 75 gsm bond	
Fax		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	30,000-page Black and Color (CMYK) Cartridges	
Photoconductor Estimated Yield: Up to ⁵	100000 Black / 90000 (CMY) pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Developer Unit(s) Estimated Yield: Up to ⁵	600000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	18,500-page Black Toner Cartridge, 11,500-page Colour (CMY) Toner Cartridges	
Paper Handling		
Included Paper Handling	Integrated Duplex, 250-Sheet Output Bin, 150-Sheet Multipurpose Feeder, 2 x 500-Sheet Input	
Optional Paper Handling	Staple Finisher, Staple Punch Finisher, 2500-Sheet Tandem Tray, 3000-Sheet Tray, Booklet Finisher, 2 x 500-Sheet Tray	
Paper Input Capacity: Up to	Standard: 1150 pages 75 gsm bond / Maximum: 6650 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 250 pages 75 gsm bond / Maximum: 3500 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Labels, Plain Paper, Banner Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Super Tabloid (12 x 18”), Oficio, A6, SRA3	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A), Two Front USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports / Optional Local Ports	Internal MarkNet N8360 802.11b/g/n Wireless, NFC, MarkNet N8230 Fiber Ethernet Print Server / External RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 52 dBA / Copy: 56 dBA / Scan: 53 dBA	
Specified Operating Environment	Altitude: 0 - 2500 Meters (8,200 Feet), Humidity: 15 to 85% Relative Humidity, Temperature: 10 to 30°C (50 to 86°F)	
Size (mm - H x W x D) / Weight	921 x 615 x 697 mm / 108.5 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

Product specifications		Lexmark XC9255
Print		
Display	Lexmark e-Task 10-inch (25 cm) class colour touch screen	
Print Speed: Up to ⁶	Black: 55 ppm / Colour: 55 ppm	
Time to First Page: As fast as	Black: 5.2 seconds / Colour: 6.1 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi)	
Memory	Standard: 2048 MB / Maximum: 4096 MB	
Hard Disk	Included in configuration	
Recommended Monthly Page Volume ²	7000 - 50000 pages	
Maximum Monthly Duty Cycle: Up to ³	250000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 55 cpm / Colour: 55 cpm	
Time to First Copy: as fast as	Black: 4.9 seconds / Colour: 5.8 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 160 / 160 sides per minute / Colour: 160 / 160 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 80 / 80 sides per minute / Colour: 80 / 80 sides per minute	
ADF Paper Input Capacity: Up to	100 pages 75 gsm bond	
Fax		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	30,000-page Black and Color (CMYK) Cartridges	
Photoconductor Estimated Yield: Up to ⁵	100000 Black / 90000 (CMY) pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Developer Unit(s) Estimated Yield: Up to ⁵	600000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	18,500-page Black Toner Cartridge, 11,500-page Colour (CMY) Toner Cartridges	
Paper Handling		
Included Paper Handling	Integrated Duplex, 250-Sheet Output Bin, 150-Sheet Multipurpose Feeder, 2 x 500-Sheet Input	
Optional Paper Handling	Staple Finisher, Staple Punch Finisher, 2500-Sheet Tandem Tray, 3000-Sheet Tray, Booklet Finisher, 2 x 500-Sheet Tray	
Paper Input Capacity: Up to	Standard: 1150 pages 75 gsm bond / Maximum: 6650 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 250 pages 75 gsm bond / Maximum: 3500 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Labels, Plain Paper, Banner Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Super Tabloid (12 x 18”), Oficio, A6, SRA3	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A), Two Front USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports / Optional Local Ports	Internal MarkNet N8360 802.11b/g/n Wireless, NFC, MarkNet N8230 Fiber Ethernet Print Server / External RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 52 dBA / Copy: 56 dBA / Scan: 53 dBA	
Specified Operating Environment	Altitude: 0 - 2500 Meters (8,200 Feet), Humidity: 15 to 85% Relative Humidity, Temperature: 10 to 30°C (50 to 86°F)	
Size (mm - H x W x D) / Weight	921 x 615 x 697 mm / 108.5 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.


¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

Product specifications		Lexmark XC9265
Print		
Display	Lexmark e-Task 10-inch (25 cm) class colour touch screen	
Print Speed: Up to ⁶	Black: 65 ppm / Colour: 65 ppm	
Time to First Page: As fast as	Black: 5.0 seconds / Colour: 5.9 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi)	
Memory	Standard: 2048 MB / Maximum: 4096 MB	
Hard Disk	Included in configuration	
Recommended Monthly Page Volume ²	8000 - 50000 pages	
Maximum Monthly Duty Cycle: Up to ³	275000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 65 cpm / Colour: 65 cpm	
Time to First Copy: as fast as	Black: 4.8 seconds / Colour: 5.5 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 160 / 160 sides per minute / Colour: 160 / 160 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 80 / 80 sides per minute / Colour: 80 / 80 sides per minute	
ADF Paper Input Capacity: Up to	100 pages 75 gsm bond	
Fax		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	30,000-page Black and Color (CMYK) Cartridges	
Photoconductor Estimated Yield: Up to ⁵	100000 Black / 90000 (CMY) pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Developer Unit(s) Estimated Yield: Up to ⁵	600000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	18,500-page Black Toner Cartridge, 11,500-page Colour (CMY) Toner Cartridges	
Paper Handling		
Included Paper Handling	Integrated Duplex, 250-Sheet Output Bin, 150-Sheet Multipurpose Feeder, 2 x 500-Sheet Input	
Optional Paper Handling	Staple Finisher, Staple Punch Finisher, 2500-Sheet Tandem Tray, 3000-Sheet Tray, Booklet Finisher, 2 x 500-Sheet Tray	
Paper Input Capacity: Up to	Standard: 1150 pages 75 gsm bond / Maximum: 6650 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 250 pages 75 gsm bond / Maximum: 3500 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Labels, Plain Paper, Banner Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Super Tabloid (12 x 18”), Oficio, A6, SRA3	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A), Two Front USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports / Optional Local Ports	Internal MarkNet N8360 802.11b/g/n Wireless, NFC, MarkNet N8230 Fiber Ethernet Print Server / External RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 55 dBA / Copy: 57 dBA / Scan: 53 dBA	
Specified Operating Environment	Altitude: 0 - 2500 Meters (8,200 Feet), Humidity: 15 to 85% Relative Humidity, Temperature: 10 to 30°C (50 to 86°F)	
Size (mm - H x W x D) / Weight	921 x 615 x 697 mm / 108.5 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

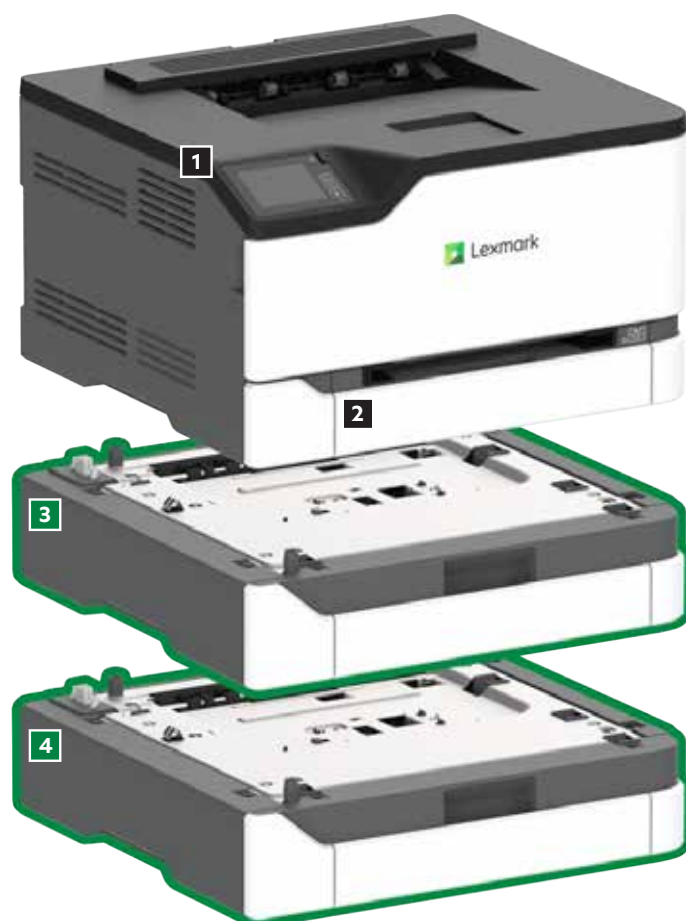

- 1 Multifunction product with 7.2 cm touch screen
243.7 x 411.2 x 394.1 mm
- 2 250-Sheet tray
Dimensions included as part of base model

- 3 250-Sheet Tray
103.9 x 411.2 x 381.0 mm
- 4 250-Sheet Tray
103.9 x 411.2 x 381.0 mm

Note 1: Average yield based on approximately 5% print coverage.

Note 2: All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at http://www.lexmark.com/publications/furniture_safety/

Standard


Optional



Product specifications		Lexmark C2326
Print		
Display	2.8 inch (7.2 cm) LCD touch panel	
Print Speed: Up to ⁵	Black: 24.7 ppm / Colour: 24.7 ppm	
Time to First Page: As fast as	Black: 10.9 seconds / Colour: 11 seconds	
Print Resolution	Black: 600 x 600 dpi, 4800 CQ (2400 x 600 dpi) / Colour: 600 x 600 dpi, 4800 CQ (2400 x 600 dpi)	
Memory	Standard: 512 MB / Maximum: 512 MB	
Hard Disk	Not Available	
Recommended Monthly Page Volume ²	750 - 5000 pages	
Maximum Monthly Duty Cycle: Up to ³	75000 pages per month	
Supplies ⁶		
Laser Cartridge Yields (up to) ¹	5,500-page Black High Yield Cartridge, 6,000-page Color (CMY) High Yield Cartridges	
Cartridge(s) Shipping with Product ⁷	1,500-page Colour (CMY) Return Program Toner Cartridges, 1,500-page Black Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	250-Sheet Input, Integrated Duplex, Single-Sheet Manual Feed, 100-Sheet Output Bin	
Optional Paper Handling	250-Sheet Tray	
Paper Input Capacity: Up to	Standard: 250+1 pages 75 gsm bond / Maximum: 750+1 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 100 pages 75 gsm bond / Maximum: 100 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Glossy paper, Paper Labels, Plain Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Hagaki Card, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	USB 2.0 Specification Hi-Speed Certified (Type B), Ethernet 10/100/1000 BaseTX (RJ-45), 802.11ac Wireless	
Noise Level: Operating	Print: 51/53 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 3048 Meters (10,000 Feet), Temperature: 10 to 32°C (50 to 90°F)	
Size (mm - H x W x D) / Weight	243.7 x 411.2 x 394.1 mm / 16.1 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹Average yield based on approximately 5% print coverage. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁵Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁶Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁷Average yield based on approximately 5% print coverage.

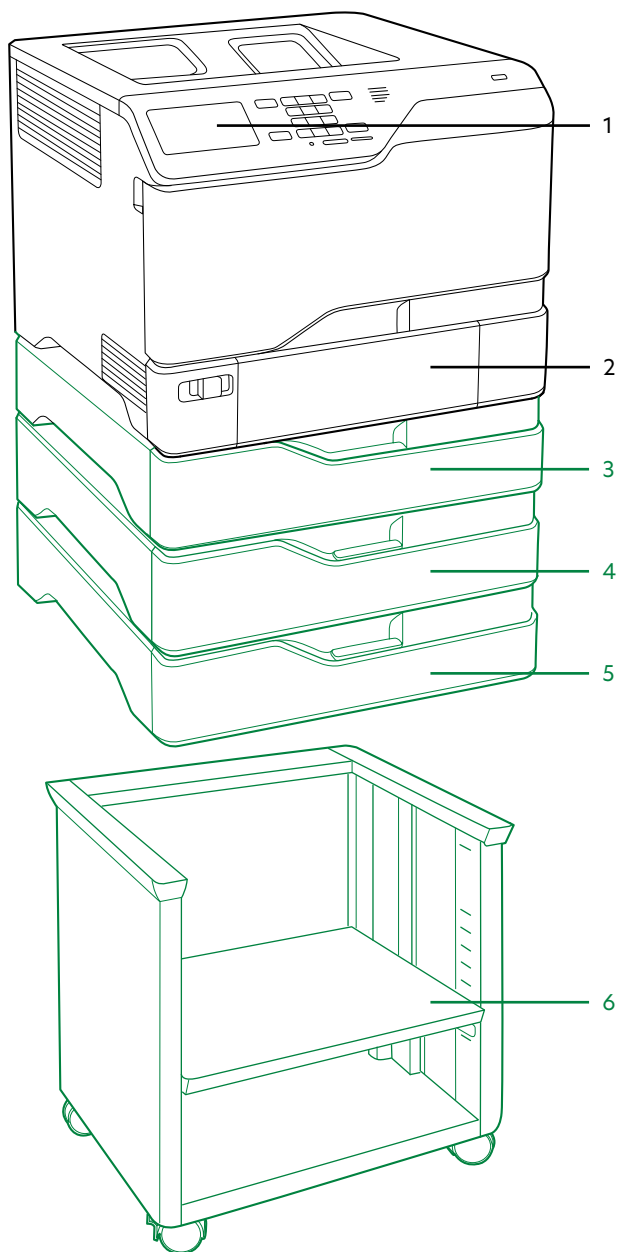

- 1 10.9 cm colour touch screen
- 2 550-sheet input with 100-sheet multi-purpose feeder
- 3 550-sheet tray

- 4 550-sheet tray
- 5 550-sheet tray
- 6 Adjustable printer stand

Standard

Optional




lexmark.com

Product specifications		Lexmark C4150
Print		
Display	Lexmark e-Task 10.9 cm (4.3-inch) colour touch screen	
Print Speed: Up to ⁶	Black: 47 ppm / Colour: 47 ppm	
Time to First Page: As fast as	Black: 5.0 seconds / Colour: 5.5 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi)	
Memory	Standard: 1024 MB / Maximum: 3072 MB	
Hard Disk	Option available	
Recommended Monthly Page Volume ²	2000 - 20000 pages	
Maximum Monthly Duty Cycle: Up to ³	150000 pages per month	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	10,000-page Color (CMY) High Yield Cartridges, 16,000-page Black High Yield Cartridge	
Imaging Unit Estimated Yield: Up to	150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	7,000-page Black and Colour (CMYK) Return Program Toner Cartridges	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex, 300-Sheet Output Bin	
Optional Paper Handling	550-Sheet Tray	
Paper Input Capacity: Up to	Standard: 650 pages 75 gsm bond / Maximum: 2300 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 300 pages 75 gsm bond / Maximum: 300 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Paper Labels, Plain Paper, Vinyl Labels, Banner Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear Hi-Speed USB port Compatible with USB 2.0 Specification (Type A)	
Optional Network Ports	Internal MarkNet N8360 802.11b/g/n Wireless, NFC	
Noise Level: Operating	Print: 53 dBA	
Specified Operating Environment	Humidity: 15 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	417 x 475 x 499 mm / 36.3 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

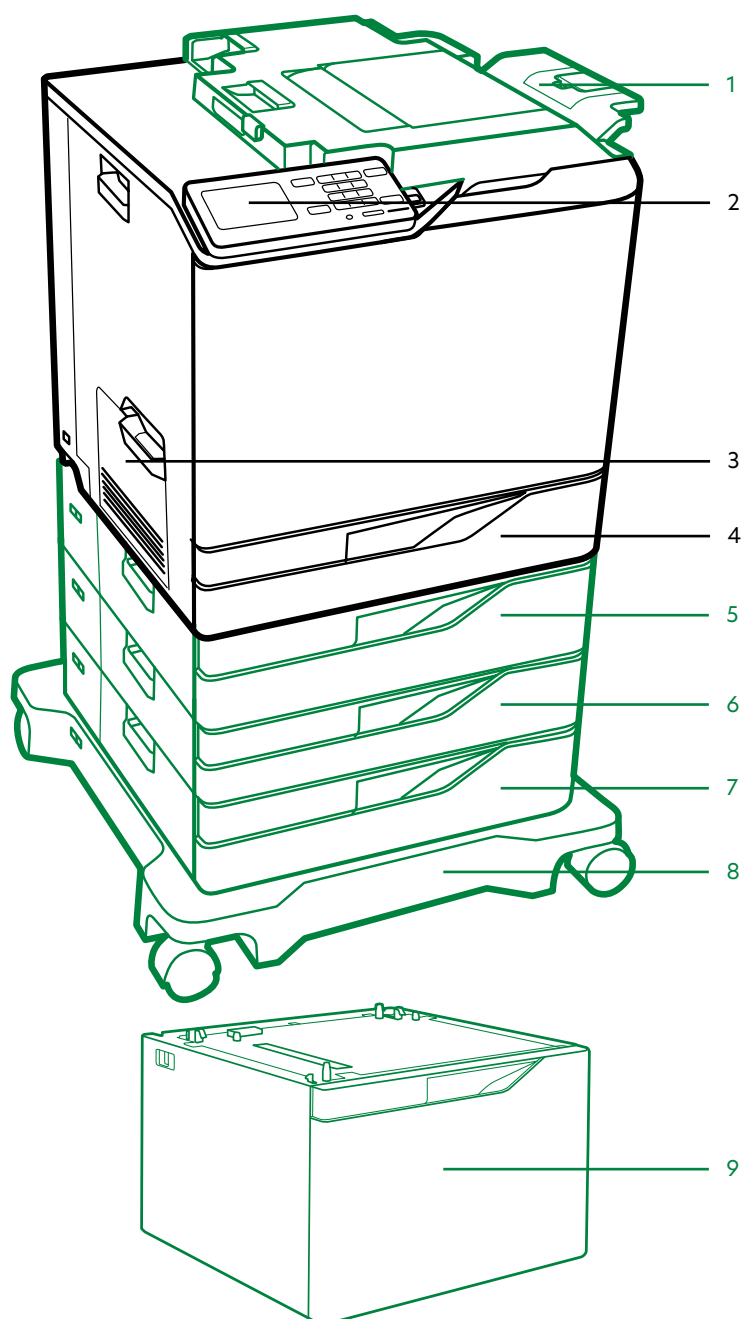

- 1 In-line finisher
- 2 10.9 cm colour touch screen
- 3 100-sheet multipurpose feeder
- 4 550-sheet input
- 5 550-sheet tray

- 6 550-sheet tray
- 7 550-sheet tray
- 8 Castor base
- 9 2200-sheet high capacity tray

■ Standard

■ Optional




[lexmark.com](https://www.lexmark.com)

Product specifications		Lexmark C6160
Print		
Display	Lexmark e-Task 4.3-inch (10.9 cm) colour touch screen	
Print Speed: Up to ⁶	Black: 57 ppm / Colour: 57 ppm	
Time to First Page: As fast as	Black: 7 seconds / Colour: 7 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi)	
Memory	Standard: 1024 MB / Maximum: 3072 MB	
Hard Disk	Option available	
Recommended Monthly Page Volume ²	2500 - 25000 pages	
Maximum Monthly Duty Cycle: Up to ³	200000 pages per month	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	20,000-page Black Extra High Yield Cartridge, 20,000-page Color (CMY) Extra High Yield Cartridges	
Photoconductor Estimated Yield: Up to ⁵	175000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	8,000-page Black and Colour (CMYK) Return Program Toner Cartridges	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex, 500-Sheet Output Bin	
Optional Paper Handling	550-Sheet Tray, Inline Stapler, 2200-Sheet Tray	
Paper Input Capacity: Up to	Standard: 650 pages 75 gsm bond / Maximum: 4500 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 500 pages 75 gsm bond / Maximum: 500 pages 75 gsm bond	
Media Types Supported	Card Stock, Dual Web Labels, Envelopes, Labels, Plain Paper, Polyester Labels, Vinyl Labels, Banner Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C4 Envelope, C5 Envelope, DL Envelope, Index Card, Executive, Folio, JIS-B5, Legal, Letter, 4 x 6", Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A)	
Optional Network Ports	Marknet N8370 WiFi Option	
Noise Level: Operating	Print: 56 dBA	
Specified Operating Environment	Humidity: 15 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	535.9 x 558.8 x 522.4 mm / 62.3 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

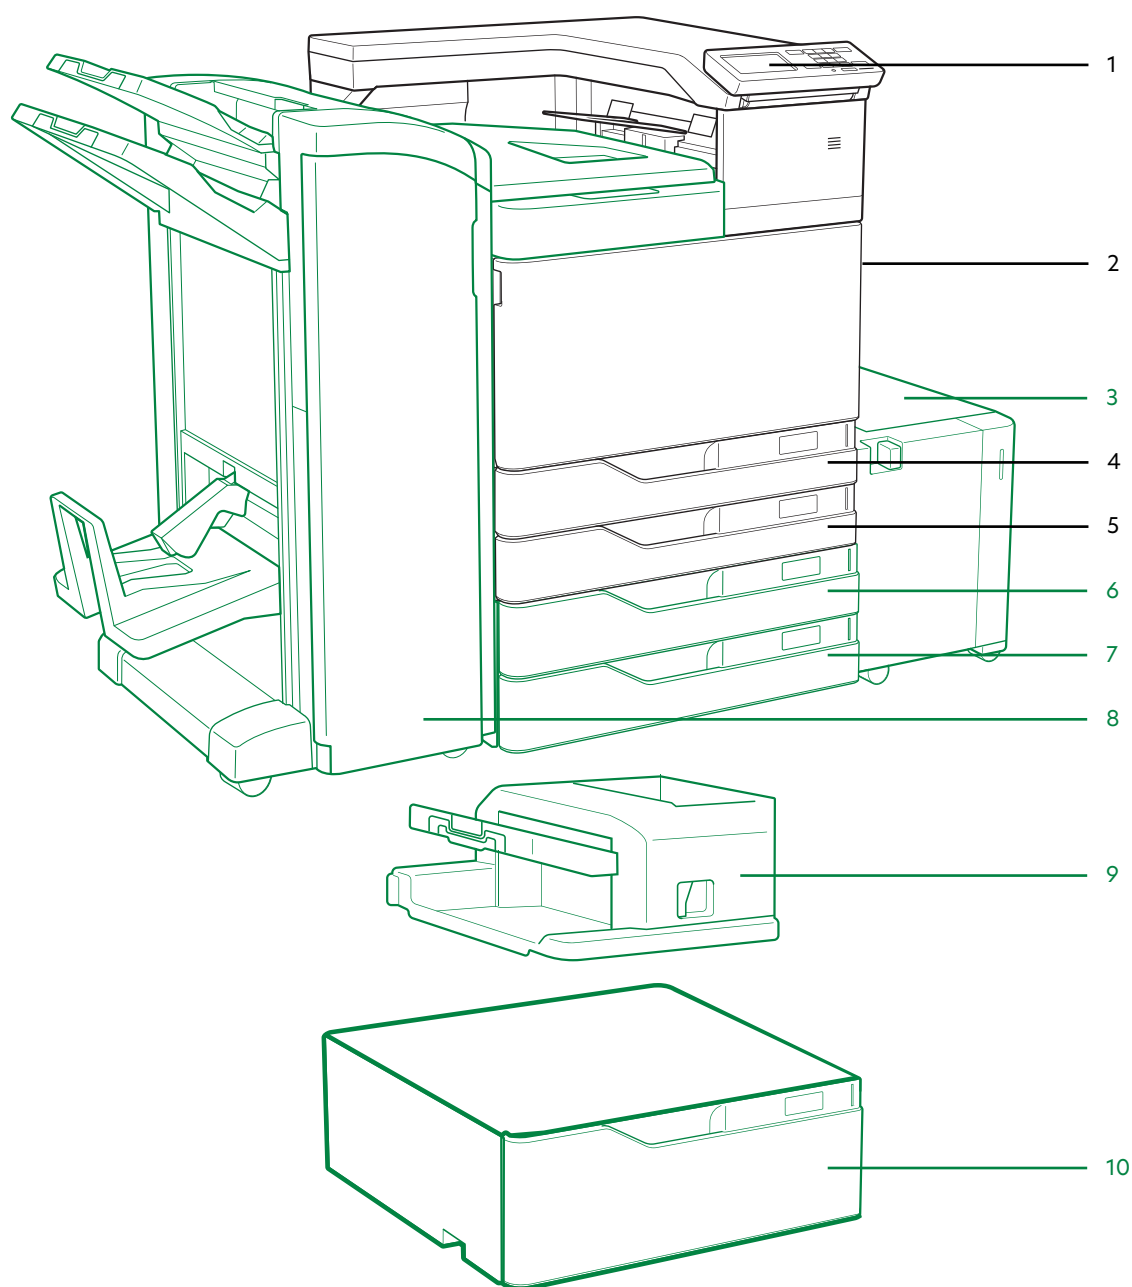

- | | | | |
|---|-------------------------------|----|---|
| 1 | 10.9 cm touch screen | 6 | 500-sheet tray |
| 2 | 150-sheet multipurpose feeder | 7 | 500-sheet tray |
| 3 | 3000-sheet tray | 8 | Booklet finisher or staple punch finisher |
| 4 | 500-sheet input | 9 | Staple finisher |
| 5 | 500-sheet input | 10 | 2500-sheet tray |

 Standard

 Optional



Product specifications		Lexmark C9235
Print		
Display	Lexmark e-Task 4.3-inch (10.9 cm) colour touch screen	
Print Speed: Up to ⁶	Black: 35 ppm / Colour: 35 ppm	
Time to First Page: As fast as	Black: 7 seconds / Colour: 8.3 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi)	
Memory	Standard: 1024 MB / Maximum: 3072 MB	
Hard Disk	Option available	
Recommended Monthly Page Volume ²	4000 - 20000 pages	
Maximum Monthly Duty Cycle: Up to ³	150000 pages per month	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	30,000-page Black and Color (CMYK) Cartridges	
Photoconductor Estimated Yield: Up to ⁵	100000 Black / 90000 (CMY) pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	6,000-page Colour (CMY) Toner Cartridges, 5,000-page Black Toner Cartridge	
Paper Handling		
Included Paper Handling	Integrated Duplex, 250-Sheet Output Bin, 150-Sheet Multipurpose Feeder, 2 x 500-Sheet Input	
Optional Paper Handling	Staple Finisher, Staple Punch Finisher, 2500-Sheet Tandem Tray, 3000-Sheet Tray, Booklet Finisher, 2 x 500-Sheet Tray	
Paper Input Capacity: Up to	Standard: 1150 pages 75 gsm bond / Maximum: 6650 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 250 pages 75 gsm bond / Maximum: 3500 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Labels, Plain Paper, Banner Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, Legal, Letter, 4 x 6", Statement, Universal, Super Tabloid (12 x 18"), Oficio, A6, SRA3	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A)	
Optional Network Ports / Optional Local Ports	Internal MarkNet N8360 802.11b/g/n Wireless, NFC, MarkNet N8230 Fiber Ethernet Print Server / External RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 51 dBA	
Specified Operating Environment	Altitude: 0 - 2500 Meters (8,200 Feet), Temperature: 10 to 40°C (50 to 104°F), Humidity: 15 to 85% Relative Humidity	
Size (mm - H x W x D) / Weight	780 x 615 x 693 mm / 88.5 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.



- 1 Multifunction product with 7.2 cm touch screen
339 x 411 x 366 mm
- 2 100-Sheet multipurpose feeder
Dimensions included as part of base model
- 3 250-Sheet tray
Dimensions included as part of base model

- 4 550-Sheet Tray
107 x 370 x 378 mm

Standard

Optional

Note 1: Supports one optional 550-sheet tray.

Note 2: All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at http://www.lexmark.com/publications/furniture_safety/



Product specifications		Lexmark XM1342
Print		
Display	2.8 inch (7.2 cm) LCD touch panel	
Print Speed: Up to ⁶	Black: 40 ppm	
Time to First Page: As fast as	Black: 5.9 seconds	
Print Resolution	Black: 2400 IQ (2400 x 600 dpi), 300 x 300 dpi, 600 x 600 dpi, 1200 IQ (1200 x 600 dpi)	
Memory	Standard: 512 MB / Maximum: 512 MB	
Hard Disk	Not Available	
Recommended Monthly Page Volume ²	800 - 8000 pages	
Maximum Monthly Duty Cycle: Up to ³	80000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 39 cpm	
Time to First Copy: as fast as	Black: 5.9 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 92 / 96 sides per minute / Colour: 40 / 42 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 46 / 48 sides per minute / Colour: 20 / 21 sides per minute	
ADF Paper Input Capacity: Up to	50 pages 75 gsm bond	
Fax		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	18,000-page High Yield Cartridge	
Imaging Unit Estimated Yield: Up to	40000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	3,000-page Black Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	250-Sheet Input, 100-Sheet Multipurpose Feeder, 150-Sheet Output Bin, Integrated Duplex	
Optional Paper Handling	550-Sheet Tray	
Paper Input Capacity: Up to	Standard: 350 pages 75 gsm bond / Maximum: 900 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Paper Labels, Plain Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	Fast Ethernet, USB Compatible with USB 2.0 Specification (Type B)	
Noise Level: Operating	Print: 53 dBA / Copy: 59 dBA / Scan: 58 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	339 x 411 x 366 mm / 12.8 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹Average yield based on approximately 5% print coverage. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸Average yield based on approximately 5% print coverage.






- 1 XM1246 with 10.9 cm colour touch screen
477 x 489 x 429.5 mm
- 2 550-sheet tray
126 x 389 x 374 mm

- 3 250-sheet tray
95 x 389 x 374 mm

 Standard

 Optional
Supports up to three optional trays.



Product specifications		Lexmark XM1246
Print		
Display	Lexmark e-Task 4.3-inch (10.9 cm) colour touch screen	
Print Speed: Up to ⁶	Black: 44 ppm	
Time to First Page: As fast as	Black: 6 seconds	
Print Resolution	Black: 1200 IQ (1200 x 600 dpi), 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi), 600 x 600 dpi	
Memory	Standard: 2048 MB / Maximum: 2048 MB	
Hard Disk	Option available	
Recommended Monthly Page Volume ²	2000 - 15000 pages	
Maximum Monthly Duty Cycle: Up to ³	120000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 44 cpm	
Time to First Copy: as fast as	Black: 6 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 84 / 90 sides per minute / Colour: 44 / 48 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 42 / 45 sides per minute / Colour: 22 / 24 sides per minute	
ADF Paper Input Capacity: Up to	50 pages 75 gsm bond	
Fax		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	21,000-page Cartridge	
Imaging Unit Estimated Yield: Up to	60000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ¹	6,000-page Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	250-Sheet Input, 100-Sheet Multipurpose Feeder, 150-Sheet Output Bin, Integrated Duplex	
Optional Paper Handling	250-Sheet Tray, 550-Sheet Tray, 550-Sheet Lockable Tray	
Paper Input Capacity: Up to	Standard: 350 pages 75 gsm bond / Maximum: 2000 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Paper Labels, Plain Paper, Transparencies, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports / Optional Local Ports	Marknet N8372 WiFi Option / Internal RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 56 dBA / Copy: 56 dBA / Scan: 55 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 5000 Meters (16,404 Feet)	
Product Guarantee	1-Year Onsite Service, Next Business Day	
Size (mm - H x W x D) / Weight	477 x 489 x 429.5 mm / 20.6 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield based on approximately 5% print coverage. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details.






- 4 Staple finisher
195 x 409 x 371.5 mm
- 1 XM3250 with 17.8 cm class touch screen
545 x 489 x 476.5 mm

- 2 550-sheet tray
126 x 389 x 374 mm
- 3 250-sheet tray
95 x 389 x 374 mm

 Standard

 Optional
Supports up to three optional trays.



Product specifications		Lexmark XM3250
Print		
Display	Lexmark e-Task 17.8 cm (7-inch) colour touch screen	
Print Speed: Up to ⁶	Black: 47 ppm	
Time to First Page: As fast as	Black: 6 seconds	
Print Resolution	Black: 1200 IQ (1200 x 600 dpi), 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi), 600 x 600 dpi	
Memory	Standard: 2048 MB / Maximum: 2048 MB	
Hard Disk	Option available	
Recommended Monthly Page Volume ²	2000 - 20000 pages	
Maximum Monthly Duty Cycle: Up to ³	175000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 47 cpm	
Time to First Copy: as fast as	Black: 6 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 94 / 100 sides per minute / Colour: 60 / 64 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 47 / 50 sides per minute / Colour: 30 / 32 sides per minute	
ADF Paper Input Capacity: Up to	100 pages 75 gsm bond	
Fax		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	21,000-page Cartridge	
Imaging Unit Estimated Yield: Up to	60000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ¹	6,000-page Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex, 250-Sheet Output Bin	
Optional Paper Handling	250-Sheet Tray, 550-Sheet Tray, 550-Sheet Lockable Tray, Inline Stapler	
Paper Input Capacity: Up to	Standard: 650 pages 75 gsm bond / Maximum: 2300 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 250 pages 75 gsm bond / Maximum: 250 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Paper Labels, Plain Paper, Transparencies, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports / Optional Local Ports	Marknet N8372 WiFi Option / Internal RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 55 dBA / Copy: 56 dBA / Scan: 55 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 5000 Meters (16,404 Feet)	
Product Guarantee	1-Year Onsite Service, Next Business Day	
Size (mm - H x W x D) / Weight	545 x 489 x 476.5 mm / 22.3 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield based on approximately 5% print coverage. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details.





1 XM5365 with 17.8 cm class e-Task colour touch screen
739.1 x 558.8 x 578.4 mm

2 100-sheet multipurpose feeder
Dimensions included as part of base model

3 550-sheet tray
Dimensions included as part of base model

4 550-sheet tray
110 x 428 x 510 mm

5 2100-sheet tray
350 x 428 x 510 mm

6 Castor base
126 x 521 x 693 mm

7 250-sheet tray
80 x 428 x 510 mm

8 550-sheet lockable tray
110 x 428 x 510 mm

9 250-sheet lockable tray
80 x 428 x 510 mm

10 Swivel cabinet
263 x 476 x 600 mm

11 Adjustable printer stand
584.2 x 596.9 x 596.9

12 Spacer to add additional height
110 x 428 x 510 mm

Note 1: Supports up to 3 optional 550-sheet trays; OR one optional 550-sheet tray and one optional 2100-sheet tray. For maximum paper input capacity, instal 1 optional 550-sheet tray and one optional 2100-sheet tray. When a 2100-sheet tray is installed, it must be the bottom tray, and a castor base is required.

Note 2: All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at http://www.lexmark.com/publications/furniture_safety/

Standard

Optional



Product specifications		Lexmark XM5365
Print		
Display	Lexmark e-Task 7-inch (17.8 cm) color touch screen	
Print Speed: Up to ⁶	Black: 61 ppm	
Time to First Page: As fast as	Black: 4.2 seconds	
Print Resolution	Black: 1200 IQ (1200 x 600 dpi), 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi), 300 x 300 dpi, 600 x 600 dpi	
Memory	Standard: 2048 MB / Maximum: 6144 MB	
Hard Disk	Option available	
Recommended Monthly Page Volume ²	5000 - 75000 pages	
Maximum Monthly Duty Cycle: Up to ³	300000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 61 cpm	
Time to First Copy: as fast as	Black: 4.2 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 144 / 150 sides per minute / Colour: 144 / 150 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 72 / 75 sides per minute / Colour: 72 / 75 sides per minute	
ADF Paper Input Capacity: Up to	200 pages 75 gsm bond	
Fax		
Modem Speed	33,600 BPS Max, V.34 Half Duplex Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	45,000-page Extra High Yield Cartridge	
Imaging Unit Estimated Yield: Up to	150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ¹	11,000-page Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, 550-Sheet Output Bin, Integrated Duplex	
Optional Paper Handling	250-Sheet Tray, 550-Sheet Tray, 2100-Sheet Tray, 250-Sheet Lockable Tray, 550-Sheet Lockable Tray	
Paper Input Capacity: Up to	Standard: 650 pages 75 gsm bond / Maximum: 3300 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 550 pages 75 gsm bond / Maximum: 550 pages 75 gsm bond	
Media Types Supported	Card Stock, Dual Web Labels, Envelopes, Integrated Labels, Paper Labels, Plain Paper, Transparencies, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports / Optional Local Ports	Marknet N8370 WiFi Option, MarkNet N8230 Fiber Ethernet Print Server, Marknet N8372 WiFi Option / Internal RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 57 dBA / Copy: 60 dBA / Scan: 56 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	739.1 x 558.8 x 578.4 mm / 44.1 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details.



1 XM5370 with 17.8 cm class e-Task colour touch screen
739.1 x 558.8 x 578.4 mm

2 100-sheet multipurpose feeder
Dimensions included as part of base model

3 550-sheet tray
Dimensions included as part of base model

4 550-sheet tray
110 x 428 x 510 mm

5 2100-sheet tray
350 x 428 x 510 mm

6 Castor base
126 x 521 x 693 mm

7 250-sheet tray
80 x 428 x 510 mm

8 550-sheet lockable tray
110 x 428 x 510 mm

9 250-sheet lockable tray
80 x 428 x 510 mm

10 Swivel cabinet
263 x 476 x 600 mm

11 Adjustable printer stand
584.2 x 596.9 x 596.9

12 Spacer to add additional height
110 x 428 x 510 mm

Note 1: Supports up to 3 optional 550-sheet trays; OR one optional 550-sheet tray and one optional 2100-sheet tray. For maximum paper input capacity, instal 1 optional 550-sheet tray and one optional 2100-sheet tray. When a 2100-sheet tray is installed, it must be the bottom tray, and a castor base is required.

Note 2: All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at http://www.lexmark.com/publications/furniture_safety/

Standard

Optional



Product specifications		Lexmark XM5370
Print		
Display	Lexmark e-Task 7-inch (17.8 cm) color touch screen	
Print Speed: Up to ⁶	Black: 66 ppm	
Time to First Page: As fast as	Black: 4.0 seconds	
Print Resolution	Black: 1200 IQ (1200 x 600 dpi), 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi), 300 x 300 dpi, 600 x 600 dpi	
Memory	Standard: 2048 MB / Maximum: 6144 MB	
Hard Disk	Included in configuration	
Recommended Monthly Page Volume ²	5000 - 100000 pages	
Maximum Monthly Duty Cycle: Up to ³	350000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 66 cpm	
Time to First Copy: as fast as	Black: 4.0 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 144 / 150 sides per minute / Colour: 144 / 150 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 72 / 75 sides per minute / Colour: 72 / 75 sides per minute	
ADF Paper Input Capacity: Up to	200 pages 75 gsm bond	
Fax		
Modem Speed	Max is 33,600 bps, V.34 Half-Duplex Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	45,000-page Extra High Yield Cartridge	
Imaging Unit Estimated Yield: Up to	150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ¹	11,000-page Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, 550-Sheet Output Bin, Integrated Duplex	
Optional Paper Handling	250-Sheet Tray, 550-Sheet Tray, 2100-Sheet Tray, 250-Sheet Lockable Tray, 550-Sheet Lockable Tray	
Paper Input Capacity: Up to	Standard: 650 pages 75 gsm bond / Maximum: 3300 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 550 pages 75 gsm bond / Maximum: 550 pages 75 gsm bond	
Media Types Supported	Card Stock, Dual Web Labels, Envelopes, Integrated Labels, Paper Labels, Plain Paper, Transparencies, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports / Optional Local Ports	Marknet N8370 WiFi Option, MarkNet N8230 Fiber Ethernet Print Server, Marknet N8372 WiFi Option / Internal RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 57 dBA / Copy: 60 dBA / Scan: 56 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	739.1 x 558.8 x 578.4 mm / 44.1 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details.



- 1 Multifunction product with 25 cm class e-Task colour touch screen

1150.6 x 685.8 x 693.4 mm

- 2 100-sheet multipurpose feeder
Dimensions included as part of base model

- 3 550-sheet tray
Dimensions included as part of base model

- 4 550-sheet tray
Dimensions included as part of base model

- 5 550-sheet tray
110 x 559 x 508mm

Note 1: Supports up to 2 optional 550-sheet trays.

Note 2: Supports one optional staple, hole punch finisher; OR one optional staple finisher; OR one optional 4-bin letterbox; OR one optional offset stacker.

Note 3: All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at http://www.lexmark.com/publications/furniture_safety/

- 6 Castor base
Dimensions included as part of base model

- 7 Staple, hole punch finisher
263 x 462 x 507 mm

- 8 Staple finisher
246 x 435 x 414 mm

- 9 4-Bin letterbox
272 x 421 x 384 mm

- 10 Offset stacker
246 x 435 x 414 mm

Standard

Optional



Product specifications		Lexmark XM7355
Print		
Display	Lexmark e-Task 10-inch (25 cm) class colour touch screen	
Print Speed: Up to ⁶	Black: 52 ppm	
Time to First Page: As fast as	Black: 4.5 seconds	
Print Resolution	Black: 1200 IQ (1200 x 600 dpi), 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi), 300 x 300 dpi, 600 x 600 dpi	
Memory	Standard: 2048 MB / Maximum: 6144 MB	
Hard Disk	Included in configuration	
Recommended Monthly Page Volume ²	3000 - 50000 pages	
Maximum Monthly Duty Cycle: Up to ³	300000 pages per month	
Copy		
Copy Speed: Up to ⁶	Black: 52 cpm	
Time to First Copy: as fast as	Black: 4.5 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 144 / 150 sides per minute / Colour: 144 / 150 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 72 / 75 sides per minute / Colour: 72 / 75 sides per minute	
ADF Paper Input Capacity: Up to	200 pages 75 gsm bond	
Fax		
Modem Speed	Max is 33,600 bps, V.34 Half-Duplex Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	45,000-page Extra High Yield Cartridge	
Imaging Unit Estimated Yield: Up to	150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ¹	11,000-page Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, 550-Sheet Output Bin, Integrated Duplex, 550-Sheet Tray	
Optional Paper Handling	550-Sheet Tray, 2100-Sheet Tray	
Paper Input Capacity: Up to	Standard: 1200 pages 75 gsm bond / Maximum: 3300 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 550 pages 75 gsm bond / Maximum: 1050 pages 75 gsm bond	
Media Types Supported	Card Stock, Dual Web Labels, Envelopes, Integrated Labels, Paper Labels, Plain Paper, Transparencies, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports / Optional Local Ports	Marknet N8370 WiFi Option, MarkNet N8230 Fiber Ethernet Print Server, Marknet N8372 WiFi Option / Internal RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 54 dBA / Copy: 58 dBA / Scan: 57 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	1150.6 x 685.8 x 693.4 mm / 67.0 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details.




Product specifications		Lexmark XM7370
Print		
Display	Lexmark e-Task 10-inch (25 cm) class colour touch screen	
Print Speed: Up to ⁶	Black: 66 ppm	
Time to First Page: As fast as	Black: 4.0 seconds	
Print Resolution	Black: 1200 IQ (1200 x 600 dpi), 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi), 300 x 300 dpi, 600 x 600 dpi	
Memory	Standard: 2048 MB / Maximum: 6144 MB	
Hard Disk	Included in configuration	
Recommended Monthly Page Volume ²	5000 - 100000 pages	
Maximum Monthly Duty Cycle: Up to ³	350000 pages per month	
Copy		
Time to First Copy: as fast as	Black: 4.0 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 144 / 150 sides per minute / Colour: 144 / 150 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 72 / 75 sides per minute / Colour: 72 / 75 sides per minute	
ADF Paper Input Capacity: Up to	200 pages 75 gsm bond	
Fax		
Modem Speed	Max is 33,600 bps, V.34 Half-Duplex Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	45,000-page Extra High Yield Cartridge	
Imaging Unit Estimated Yield: Up to	150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ¹	11,000-page Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, 550-Sheet Output Bin, Integrated Duplex, 550-Sheet Tray	
Optional Paper Handling	550-Sheet Tray, 2100-Sheet Tray	
Paper Input Capacity: Up to	Standard: 1200 pages 75 gsm bond / Maximum: 3300 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 550 pages 75 gsm bond / Maximum: 1050 pages 75 gsm bond	
Media Types Supported	Card Stock, Dual Web Labels, Envelopes, Integrated Labels, Paper Labels, Plain Paper, Transparencies, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports / Optional Local Ports	Marknet N8370 WiFi Option, MarkNet N8230 Fiber Ethernet Print Server, Marknet N8372 WiFi Option / Internal RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 56 dBA / Copy: 59 dBA / Scan: 57 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	1150.6 x 685.8 x 693.4 mm / 67.0 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details.

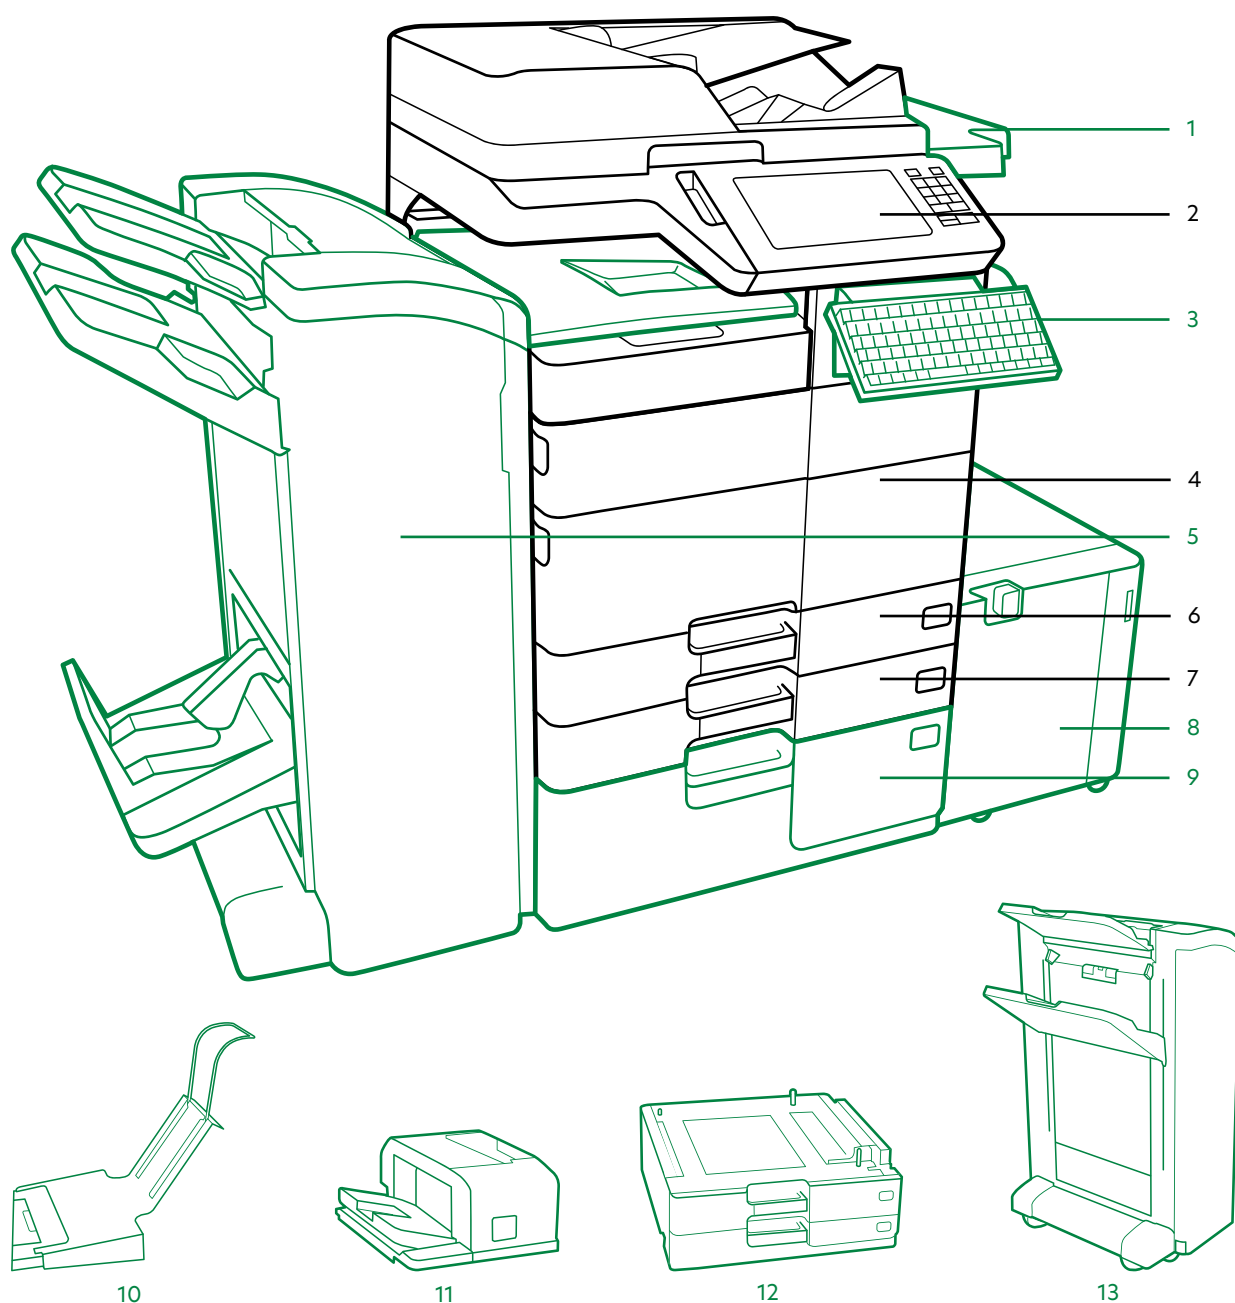

- 1 Working table
- 2 25 cm class touch screen
- 3 Keyboard kit
- 4 150-sheet multipurpose feeder
- 5 Booklet finisher
- 6 500-sheet input
- 7 500-sheet input

- 8 3000-sheet tray
- 9 2500-sheet tandem tray
- 10 Banner tray
- 11 Inner finisher
- 12 2 x 500-sheet tray
- 13 Staple punch finisher

■ Standard

■ Optional



Product specifications		Lexmark XM9145
Print		
Display	Lexmark e-Task 10-inch (25 cm) class colour touch screen	
Print Speed: Up to ⁵	Black: 45 ppm	
Time to First Page: As fast as	Black: < 5.6 seconds	
Print Resolution	Black: 1200 IQ (1200 x 600 dpi), 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi), 600 x 600 dpi	
Memory / Processor	Standard: 1024 MB / Maximum: 3072 MB / Dual Core, 800 MHz	
Hard Disk	Included in configuration	
Recommended Monthly Page Volume ²	15000 - 50000 pages	
Maximum Monthly Duty Cycle: Up to ³	200000 pages per month	
Copy		
Copy Speed: Up to ⁵	Black: 45 cpm	
Time to First Copy: as fast as	Black: 5.8 seconds	
Scan		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 140 sides per minute / Colour: 140 sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 80 sides per minute / Colour: 80 sides per minute	
ADF Paper Input Capacity: Up to	100 pages 75 gsm bond	
Fax		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies		
Laser Cartridge Yields (up to) ¹	25,000-page High Yield Cartridge	
Photoconductor Estimated Yield: Up to ⁴	125000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁶	21,000-page Toner Cartridge	
Paper Handling		
Included Paper Handling	250-Sheet Output Bin, 150-Sheet Multipurpose Feeder, 2 x 500-Sheet Input	
Optional Paper Handling	Staple Punch Finisher, Inline Stapler, 2500-Sheet Tandem Tray, 3000-Sheet Tray, Booklet Finisher, 2 x 500-Sheet Tray	
Paper Input Capacity: Up to	Standard: 1150 pages 75 gsm bond / Maximum: 6650 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 250 pages 75 gsm bond / Maximum: 3500 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide.	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B4, JIS-B5, Ledger, Legal, Letter, Statement, Universal, Super Tabloid (12 x 18"), Oficio, A6, SRA3	
General Information		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A)	
Optional Network Ports / Optional Local Ports	Internal MarkNet N8350 802.11b/g/n Wireless / Internal RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 52 dBA / Copy: 53 dBA / Scan: 57 dBA	
Specified Operating Environment	Altitude: 0 - 2500 Meters (8,200 Feet), Humidity: 15 to 85% Relative Humidity, Temperature: 10 to 30°C (50 to 86°F)	
Size (mm - H x W x D) / Weight	909 x 615 x 697 mm / 95 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield based on approximately 5% print coverage. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁵Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁶Average standard page yield value in one-sided (simplex) mode declared in accordance with ISO/IEC 19752.



- 1 Printer with 2-line display
222 x 368 x 363 mm
- 2 100-Sheet multipurpose feeder
Dimensions included as part of base model
- 3 250-Sheet tray
Dimensions included as part of base model

- 4 550-Sheet Tray
107 x 370 x 378 mm

■ Standard
■ Optional

Note 1: Supports one optional 550-sheet tray.

Note 2: All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at http://www.lexmark.com/publications/furniture_safety/



Product specifications		Lexmark M1342
Print		
Display	2-line All Points Addressable (APA) monochrome LCD display	
Print Speed: Up to ⁶	Black: 40 ppm	
Time to First Page: As fast as	Black: 5.9 seconds	
Print Resolution	Black: 2400 IQ (2400 x 600 dpi), 600 x 600 dpi	
Memory	Standard: 256 MB / Maximum: 256 MB	
Hard Disk	Not Available	
Recommended Monthly Page Volume ²	800 - 8000 pages	
Maximum Monthly Duty Cycle: Up to ³	80000 pages per month	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	18,000-page High Yield Cartridge	
Imaging Unit Estimated Yield: Up to	40000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ⁸	3,000-page Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	250-Sheet Input, 100-Sheet Multipurpose Feeder, 150-Sheet Output Bin, Integrated Duplex	
Optional Paper Handling	550-Sheet Tray	
Paper Input Capacity: Up to	Standard: 350 pages 75 gsm bond / Maximum: 900 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Paper Labels, Plain Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	Fast Ethernet, USB Compatible with USB 2.0 Specification (Type B)	
Noise Level: Operating	Print: 53 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	222 x 368 x 363 mm / 9.3 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹Average yield based on approximately 5% print coverage. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸Average yield based on approximately 5% print coverage.





- 1 M1246 with 2-line display
260 x 399 x 374 mm
- 2 550-sheet tray
126 x 389 x 374 mm

- 3 250-sheet tray
95 x 389 x 374 mm

Standard

Optional

Supports one optional tray.



lexmark.com

Product specifications		Lexmark M1246
Print		
Display		2.4-inch (60 mm) Color LCD display
Print Speed: Up to ⁶		Black: 44 ppm
Time to First Page: As fast as		Black: 6.0 seconds
Print Resolution		Black: 1200 IQ (1200 x 600 dpi), 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi), 300 x 300 dpi, 600 x 600 dpi
Memory		Standard: 512 MB / Maximum: 512 MB
Hard Disk		Not Available
Recommended Monthly Page Volume ²		2000 - 15000 pages
Maximum Monthly Duty Cycle: Up to ³		120000 pages per month
Supplies⁷		
Laser Cartridge Yields (up to) ¹		21,000-page Cartridge
Imaging Unit Estimated Yield: Up to		60000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage
Cartridge(s) Shipping with Product ⁸		5,000-page Return Program Toner Cartridge
Paper Handling		
Included Paper Handling		250-Sheet Input, 100-Sheet Multipurpose Feeder, 150-Sheet Output Bin, Integrated Duplex
Optional Paper Handling		250-Sheet Tray, 550-Sheet Tray, 550-Sheet Lockable Tray
Paper Input Capacity: Up to		Standard: 350 pages 75 gsm bond / Maximum: 2000 pages 75 gsm bond
Paper Output Capacity: Up to		Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond
Media Types Supported		Card Stock, Envelopes, Paper Labels, Plain Paper, Transparencies, Refer to the Paper & Specialty Media Guide
Media Sizes Supported		10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6
General Information⁴		
Standard Connectivity		USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000)
Optional Network Ports		Marknet N8370 WiFi Option
Noise Level: Operating		Print: 56 dBA
Specified Operating Environment		Temperature: 16 to 32°C (60 to 90°F), Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 5000 Meters (16,404 Feet)
Size (mm - H x W x D) / Weight		260 x 399 x 374 mm / 14.1 kg

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹Average yield based on approximately 5% print coverage. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁸Average Continuous Cartridge Yield in one-sided (simplex) mode 6,000 standard pages. Declared yield value in accordance with ISO/IEC 19752.



1 M3250 with 10.9 cm colour touch screen
303 x 399 x 374 mm

2 550-sheet tray
126 x 389 x 374 mm

3 250-sheet tray
95 x 389 x 374 mm

Standard

Optional

Supports up to three optional trays.



Product specifications		Lexmark M3250
Print		
Display	Lexmark e-Task 4.3-inch (10.9 cm) colour touch screen	
Print Speed: Up to ⁶	Black: 47 ppm	
Time to First Page: As fast as	Black: 6 seconds	
Print Resolution	Black: 1200 IQ (1200 x 600 dpi), 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi), 600 x 600 dpi	
Memory	Standard: 1024 MB / Maximum: 1024 MB	
Hard Disk	Option available	
Recommended Monthly Page Volume ²	2000 - 20000 pages	
Maximum Monthly Duty Cycle: Up to ³	175000 pages per month	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	21,000-page Cartridge	
Imaging Unit Estimated Yield: Up to	60000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ¹	6,000-page Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex, 250-Sheet Output Bin	
Optional Paper Handling	250-Sheet Tray, 550-Sheet Tray, 550-Sheet Lockable Tray	
Paper Input Capacity: Up to	Standard: 650 pages 75 gsm bond / Maximum: 2300 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 250 pages 75 gsm bond / Maximum: 250 pages 75 gsm bond	
Media Types Supported	Card Stock, Envelopes, Paper Labels, Plain Paper, Transparencies, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports / Optional Local Ports	MarkNet N8352 802.11b/g/n Wireless / Internal RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 56 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 5000 Meters (16,404 Feet)	
Product Guarantee	1-Year Return-to-Base Service	
Size (mm - H x W x D) / Weight	303 x 399 x 374 mm / 16.1 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield based on approximately 5% print coverage. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details.



1 M5255 with 10.9 cm e-Task colour touch screen

441 x 428 x 510 mm

2 100-sheet multipurpose feeder

Dimensions included as part of base model

3 550-sheet tray

Dimensions included as part of base model

4 550-sheet tray

110 x 428 x 510 mm

5 2100-sheet tray

350 x 428 x 510 mm

6 Castor base

126 x 521 x 693 mm

7 Staple, hole punch finisher

263 x 462 x 507 mm

8 Staple finisher

246 x 435 x 414 mm

9 Output expander

165 x 421 x 380 mm

10 4-Bin letterbox

272 x 421 x 384 mm

11 High capacity output expander

310 x 421 x 335 mm

12 250-sheet tray

80 x 428 x 510 mm

13 550-sheet lockable tray

110 x 428 x 510 mm

14 250-sheet lockable tray

80 x 428 x 510 mm

15 Swivel cabinet

263 x 476 x 600 mm

16 Adjustable printer stand

584.2 x 596.9 x 596.9

17 Spacer to add additional height

110 x 428 x 510 mm

 **Standard**

 **Optional**

Note 1: Supports up to 4 optional trays. For maximum paper input capacity, instal 3 optional 550-sheet trays and one optional 2100-sheet tray. When a 2100-sheet tray is installed, it must be the bottom tray, and a castor base is required.

Note 2: Supports many output configurations, including: any combination of up to three output expanders and 4-bin letterboxes; OR staple finisher with 4-bin letterbox; OR staple finisher with output expander; OR output expander with high capacity output expander; OR the staple, hole punch finisher; OR any single output option by itself. When installing the optional stapler, it must always be on top. When installing the optional high capacity output expander, it must always be on the bottom.

Note 3: All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at http://www.lexmark.com/publications/furniture_safety/



lexmark.com

Product specifications		Lexmark M5255
Print		
Display	Lexmark e-Task 4.3-inch (10.9 cm) colour touch screen	
Print Speed: Up to ⁶	Black: 52 ppm	
Time to First Page: As fast as	Black: 4.5 seconds	
Print Resolution	Black: 1200 IQ (1200 x 600 dpi), 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi), 300 x 300 dpi, 600 x 600 dpi	
Memory	Standard: 1024 MB / Maximum: 5120 MB	
Hard Disk	Option available	
Recommended Monthly Page Volume ²	3000 - 50000 pages	
Maximum Monthly Duty Cycle: Up to ³	250000 pages per month	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	45,000-page Extra High Yield Cartridge	
Imaging Unit Estimated Yield: Up to	150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ¹	11,000-page Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, 550-Sheet Output Bin, Integrated Duplex	
Optional Paper Handling	250-Sheet Tray, 550-Sheet Tray, 2100-Sheet Tray, 250-Sheet Lockable Tray, 550-Sheet Lockable Tray, 4-Bin Mailbox, Staple Finisher, Staple Punch Finisher, High Capacity Output Expander, Output Expander	
Paper Input Capacity: Up to	Standard: 650 pages 75 gsm bond / Maximum: 4400 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 550 pages 75 gsm bond / Maximum: 2550 pages 75 gsm bond	
Media Types Supported	Card Stock, Dual Web Labels, Envelopes, Integrated Labels, Paper Labels, Plain Paper, Transparencies, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports / Optional Local Ports	Marknet N8370 WiFi Option, MarkNet N8230 Fiber Ethernet Print Server, Marknet N8372 WiFi Option / Internal RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 57 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	441 x 428 x 510 mm / 25.6 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details.



1 M5270 with 10.9 cm e-Task colour touch screen

441 x 428 x 510 mm

2 100-sheet multipurpose feeder

Dimensions included as part of base model

3 550-sheet tray

Dimensions included as part of base model

4 550-sheet tray

110 x 428 x 510 mm

5 2100-sheet tray

350 x 428 x 510 mm

6 Castor base

126 x 521 x 693 mm

7 Staple, hole punch finisher

263 x 462 x 507 mm

8 Staple finisher

246 x 435 x 414 mm

9 Output expander

165 x 421 x 380 mm

10 4-Bin letterbox

272 x 421 x 384 mm

11 High capacity output expander

310 x 421 x 335 mm

12 250-sheet tray

80 x 428 x 510 mm

13 550-sheet lockable tray

110 x 428 x 510 mm

14 250-sheet lockable tray

80 x 428 x 510 mm

15 Swivel cabinet

263 x 476 x 600 mm

16 Adjustable printer stand

584.2 x 596.9 x 596.9

17 Spacer to add additional height

110 x 428 x 510 mm

 **Standard**

 **Optional**

Note 1: Supports up to 4 optional trays. For maximum paper input capacity, instal 3 optional 550-sheet trays and one optional 2100-sheet tray. When a 2100-sheet tray is installed, it must be the bottom tray, and a castor base is required.

Note 2: Supports many output configurations, including: any combination of up to three output expanders and 4-bin letterboxes; OR staple finisher with 4-bin letterbox; OR staple finisher with output expander; OR output expander with high capacity output expander; OR the staple, hole punch finisher; OR any single output option by itself. When installing the optional stapler, it must always be on top. When installing the optional high capacity output expander, it must always be on the bottom.

Note 3: All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at http://www.lexmark.com/publications/furniture_safety/



Product specifications		Lexmark M5270
Print		
Display	Lexmark e-Task 10.9 cm (4.3-inch) colour touch screen	
Print Speed: Up to ⁶	Black: 66 ppm	
Time to First Page: As fast as	Black: 4.0 seconds	
Print Resolution	Black: 1200 IQ (1200 x 600 dpi), 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi), 300 x 300 dpi, 600 x 600 dpi	
Memory	Standard: 1024 MB / Maximum: 5120 MB	
Hard Disk	Option available	
Recommended Monthly Page Volume ²	5000 - 100000 pages	
Maximum Monthly Duty Cycle: Up to ³	350000 pages per month	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	45,000-page Extra High Yield Cartridge	
Imaging Unit Estimated Yield: Up to	150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ¹	11,000-page Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, 550-Sheet Output Bin, Integrated Duplex	
Optional Paper Handling	250-Sheet Tray, 550-Sheet Tray, 2100-Sheet Tray, 250-Sheet Lockable Tray, 550-Sheet Lockable Tray, 4-Bin Mailbox, Staple Finisher, Staple Punch Finisher, High Capacity Output Expander, Output Expander	
Paper Input Capacity: Up to	Standard: 650 pages 75 gsm bond / Maximum: 4400 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 550 pages 75 gsm bond / Maximum: 2550 pages 75 gsm bond	
Media Types Supported	Card Stock, Dual Web Labels, Envelopes, Integrated Labels, Paper Labels, Plain Paper, Transparencies, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Connectivity	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A)	
Optional Network Ports / Optional Local Ports	Marknet N8370 WiFi Option, MarkNet N8230 Fiber Ethernet Print Server, Marknet N8372 WiFi Option / Internal RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 58 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Size (mm - H x W x D) / Weight	441 x 428 x 510 mm / 25.6 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average yield at approximately 5% print coverage per color. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details.

© 2021 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Union are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. AirPrint® and the AirPrint Logo® are trademarks of Apple, Inc. ENERGY STAR® is a U.S. registered mark. Google Cloud Print™ is a trademark of Google, Inc. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are trademarks, service marks, and certification marks of Mopria Alliance, Inc. in the United States and other countries. All other trademarks are the property of their respective owners. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).



lexmark.com